


QPU Series

Wheel Diameter x Wheel Width 114 x 25mm

EAN

YJ-12035354106101

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU, brown, with machined straight grain.
Increases grip on the ground and effectively improves anti-slip ability.

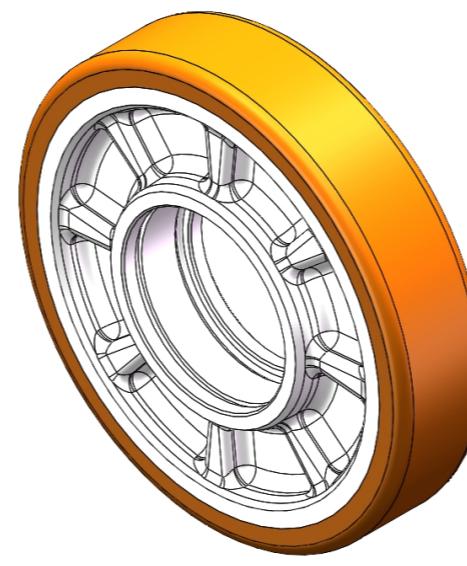

Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane
Bearings: —

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data


Metric Imperial

| | |
|-------------------------|-----------------|
| Wheel Diameter(D) | 114mm |
| Wheel Width(T2) | 25mm |
| Wheel Bearing | Without Bearing |
| Axle Bore(d) | — |
| Axle Bore(S) | 47mm |
| Bearing Bore Depth(t) | 16mm |
| Hub Length(T1) | 18mm |
| Hardness Of Tread | 92±5° Shore A |
| Load Capacity (Dynamic) | 150kgs |
| Load Capacity (Static) | 225kgs |
| Temperature | -20°C to +70°C |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 0.70kgs |
| Standard | ISO22883 |

Advantages at a glance

| | |
|----------------------------|---------|
| Rolling Resistance | • • • • |
| Operating Noise | • • • • |
| Floor Surface Preservation | • • • • |

2D Dimensional Drawing of Single Wheel

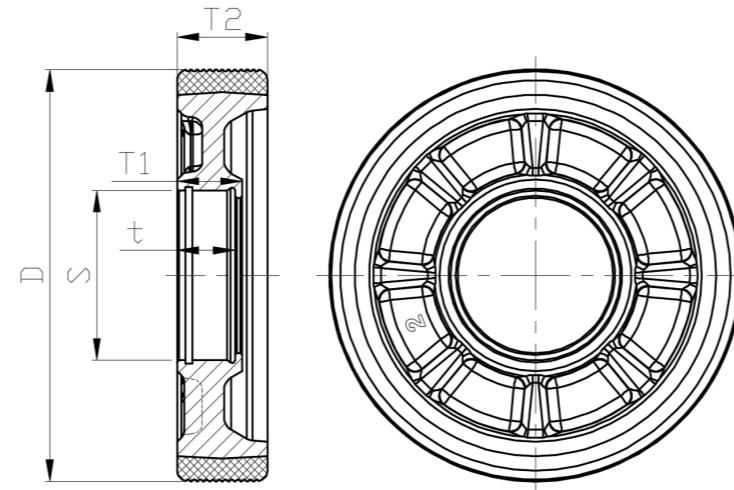

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 Dersheng International www.dersheng.com