

QPU Series

Wheel Diameter x Wheel Width 114 x 25mm

EAN

YJ-12035354106171

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU brown surface with machined straight grain.
Increases grip on the ground and effectively improves anti-slip ability.



Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane
Bearing: Ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product


Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial
Wheel Diameter(D) 114mm
Wheel Width(T2) 25mm
Wheel Bearing Ball Bearing
Axle Bore(d) 25mm
Axle Bore(S) —
Bearing Bore Depth(t) —
Hub Length(T1) 18mm
Hardness Of Tread 92±5° Shore A
Load Capacity (Dynamic) 150kgs
Load Capacity (Static) 225kgs
Temperature -20°C to +70°C
Electrical Conductivity N/A
Anti-Static N/A
Weight 0.79kgs
Standard ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

2D Dimensional Drawing of Single Wheel

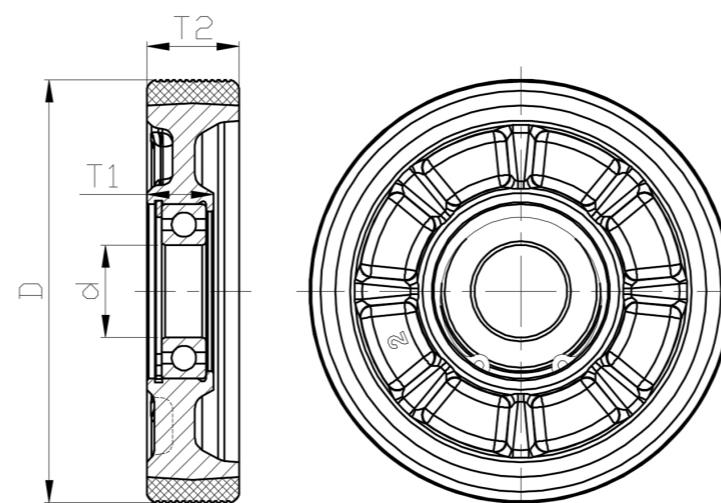

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 Dersheng International www.dersheng.com