

QPU Series



Wheel Diameter × Wheel Width 114 x 25mm


EAN

YJ-12035354106171

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU brown surface with machined straight grain.
Increases grip on the ground and effectively improves anti-slip ability.

Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane
Bearing: Ball bearing

Drawings are for reference only and may differ from the product

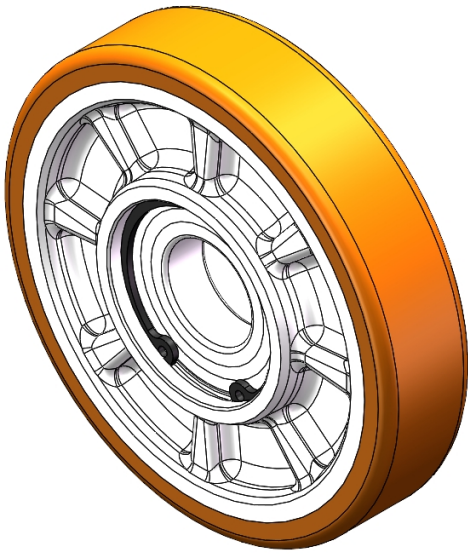

Picture may differ from original product


Technical Data

<input checked="" type="radio"/> Imperial <input type="radio"/> Metric	
Wheel Diameter(D)	4-1/2 "
Wheel Width(T2)	5-1/25 "
Wheel Bearing	Ball Bearing
Axle Bore(d)	1 "
Axle Bore(S)	—
Bearing Bore Depth(t)	—
Hub Lenth(T1)	3/4 "
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	331lbs
Load Capacity (Static)	496lbs
Temperature	-4°F to +158°F
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.7lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Single Wheel

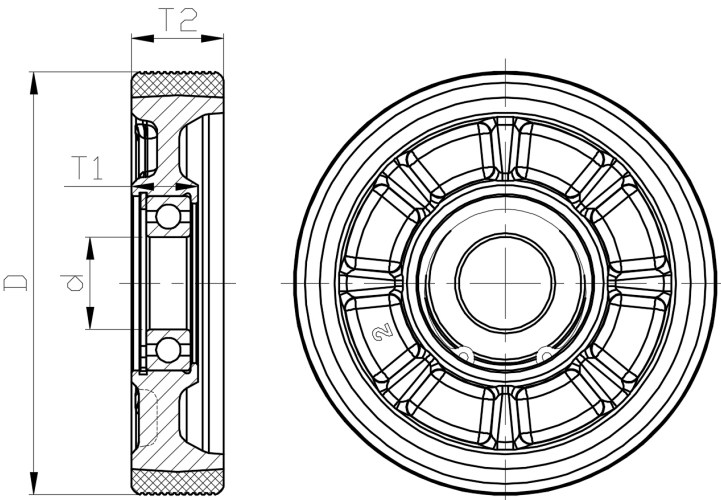

* For any deviation between metric and imperial spec, please refer to the metric spec.