

VQPU Series



Wheel Diameter × Wheel Width 250 x 62mm


EAN

YJ-12035410259701

Good elasticity, reduces pushing resistance, improves machine tool operability, and has good wear resistance.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU natural color, Wheel Tread profile: Crown.

Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane
Bearings: —

Drawings are for reference only and may differ from the product

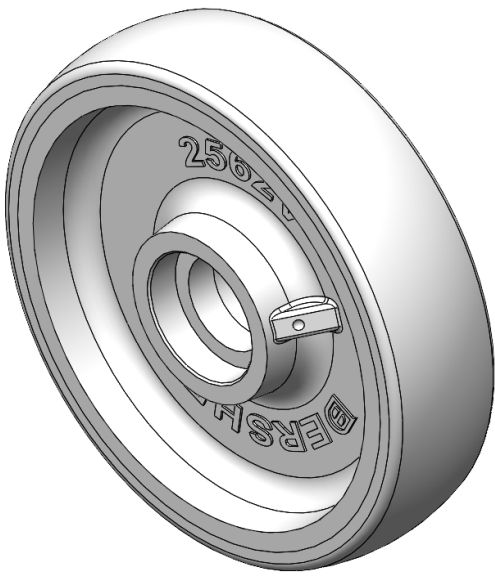

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter(D)	250mm
Wheel Width(T2)	62mm
Wheel Bearing	Without Bearing
Axle Bore(d)	—
Axle Bore(S)	62mm
Bearing Bore Depth(t)	16mm
Hub Lenth(T1)	61mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	1500kgs
Load Capacity (Static)	2250kgs
Temperature	-20°C to +70°C
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	7.60kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Single Wheel

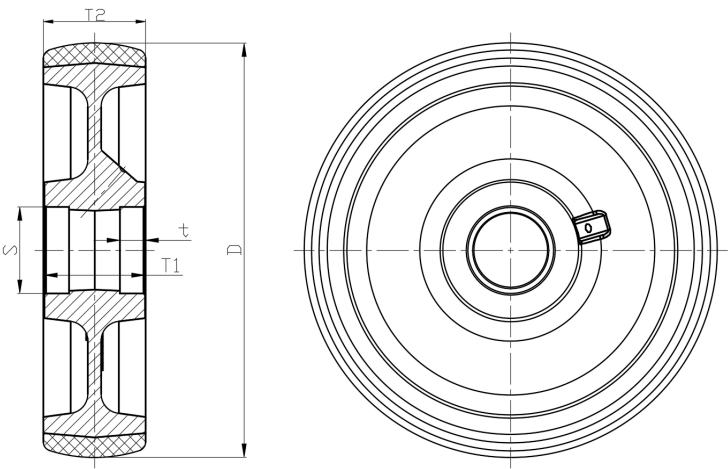

* For any deviation between metric and imperial spec, please refer to the metric spec.