


Wheel Diameter x Wheel Width 125 x 40mm

EAN

YJ-12036005155471

It has good elasticity, reduces pushing resistance, improves machine tool operability, and has good wear resistance.
 It has excellent Hydrolysis Resistance.
 Suitable for tropical regions and humid working environments.
 QPU Blue, Curved Wheel Surface

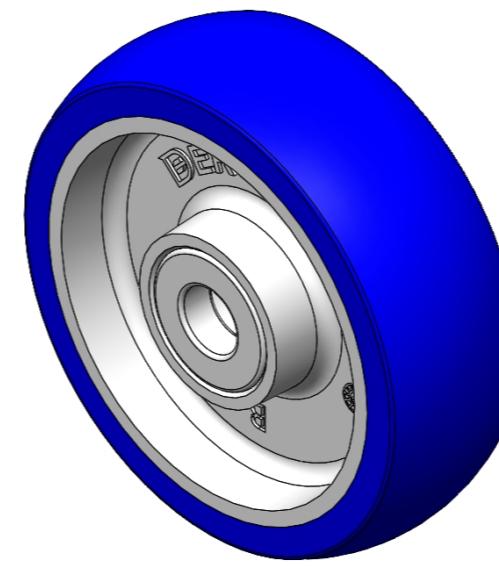

Wheel Center: Aluminum core
 Wheel Tread: High-quality polyurethane
 Bearing: Ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

Technical Data

Imperial Metric

Wheel Diameter(D) 5 "

Wheel Width(T2) 1-5/8 "

Wheel Bearing Ball Bearing

Axe Bore(d) 11/16 "

Axe Bore(S) —

Bearing Bore Depth(t) —

Hub Lenth(T1) 1-5/8 "

Hardness Of Tread 87±5° Shore A

Load Capacity (Dynamic) 772lbs

Load Capacity (Static) 1157lbs

Temperature -4°F to +158°F

Electrical Conductivity Y

Anti-Static Y


Weight 1.3lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

2D Dimensional Drawing of Single Wheel

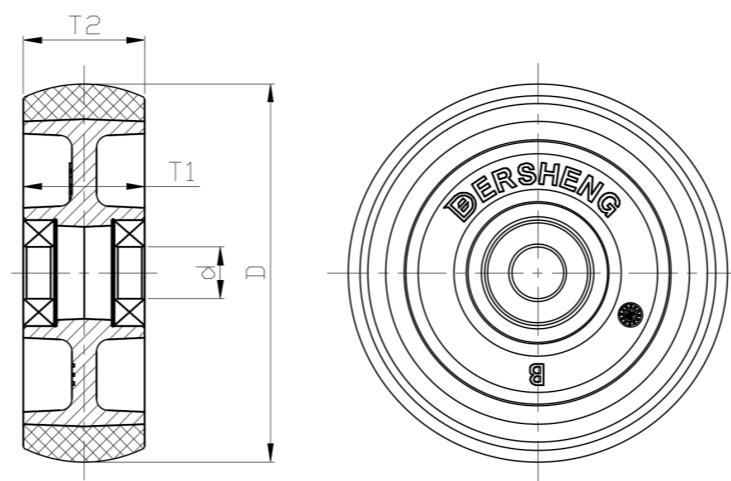

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com