

XPU Series




Wheel Diameter × Wheel Width 125 x 45mm

EAN

YJ-12036105180103

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.
Excellent resistance to chemicals, solvents, and corrosion.
Suitable for Forklift Trucks, Electric Stackers, Heavy duty machines, AGVs, and automated industrial applications.
XPU Burgundy

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane

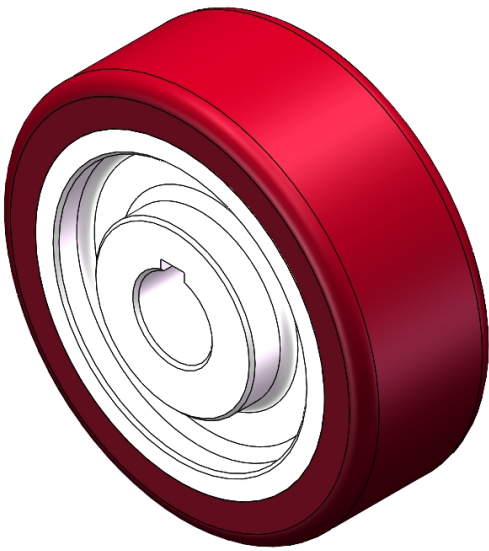

Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial	
Wheel Diameter (D)	125mm
Wheel Width (T2)	45mm
Wheel installation — Hub Lenth (T1)	50mm
Wheel Mounting Bore Diameter	25mm
Keyway Width	8mm
Wheel Keyway Depth (H)	28.3mm
Load Capacity (Static)	750kgs
Load Capacity at 4 km/h	500kgs
Load Capacity at 6 km/h	425kgs
Load Capacity at 10 km/h	350kgs
Load Capacity at 16 km/h	200kgs
Hardness Of Tread	92±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Cast iron / spray-baked black paint
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	2.40kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ● ○

2D Dimensional Drawing of Drive Wheel

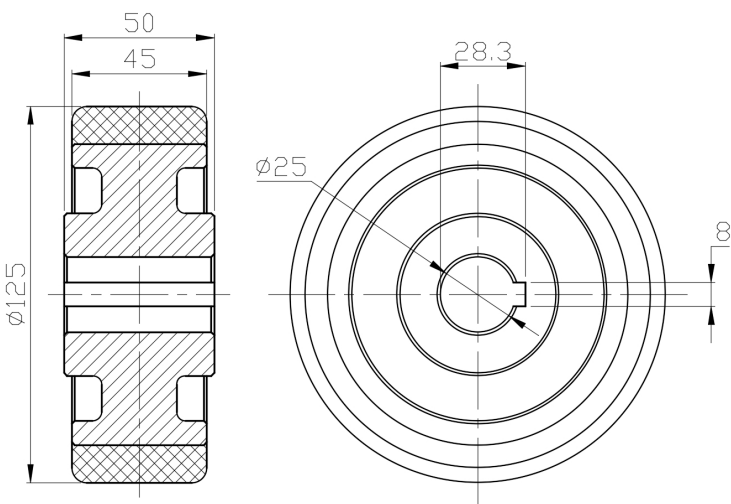

* For any deviation between metric and imperial spec, please refer to the metric spec.