

XPU Series




Wheel Diameter × Wheel Width 202 x 50mm

EAN

YJ-12036108200101

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.
Excellent resistance to chemicals, solvents, and corrosion.
Suitable for Forklift Trucks, electric Forklift Trucks, Heavy duty machines, AGVs, and automated industrial applications.
XPU Burgundy

Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane

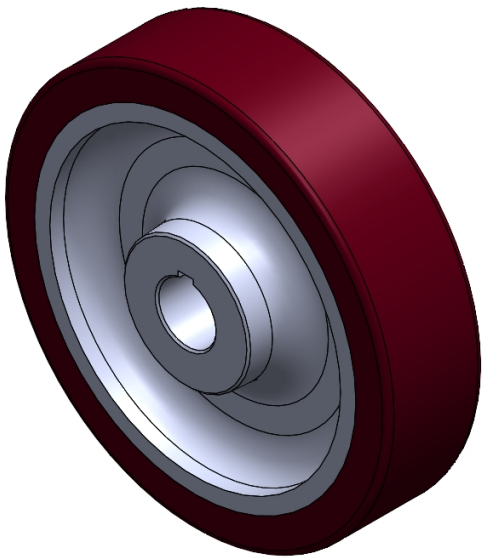

Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	202mm
Wheel Width (T2)	50mm
Wheel installation — Hub Lenth (T1)	60mm
Wheel Mounting Bore Diameter	30mm
Keyway Width	8mm
Wheel Keyway Depth (H)	33mm
Load Capacity (Static)	2100kgs
Load Capacity at 4 km/h	1400kgs
Load Capacity at 6 km/h	1190kgs
Load Capacity at 10 km/h	980kgs
Load Capacity at 16 km/h	560kgs
Hardness Of Tread	92±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Cast iron / spray-baked black paint
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	4.7kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ● ○

2D Dimensional Drawing of Drive Wheel

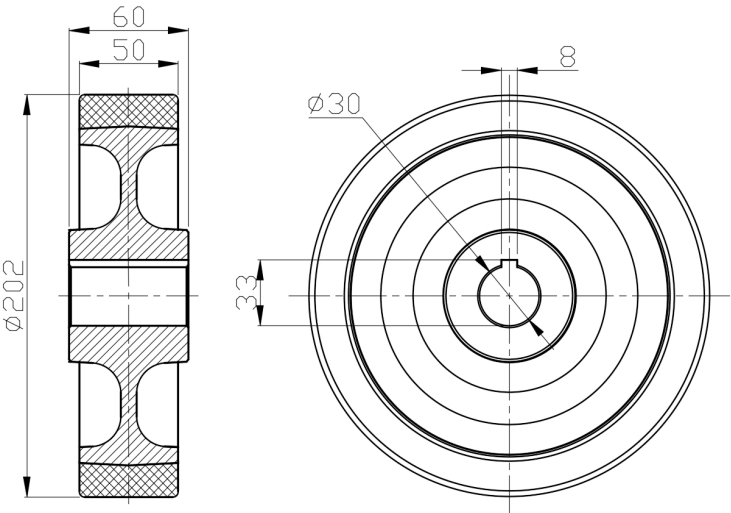

* For any deviation between metric and imperial spec, please refer to the metric spec.