Product Information Sheet

XPU Series

Wheel Diameter × Wheel Width 202 x 50mm

EAN

YJ-12036108200101

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.

Excellent resistance to chemicals, solvents, and corrosion.

Suitable for Forklift Trucks, electric Forklift Trucks, Heavy duty machines, AGVs, and automated industrial applications.

XPU Burgundy

Wheel Center: cast iron core

Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric	
Wheel Diameter (D)	8 "
Wheel Width (T2)	2"
Wheel installation — Hub Lenth (T1)	2-7/16 "
Wheel Mounting Bore Diameter	1-3/16 "
Keyway Width	3/8 "
Wheel Keyway Depth (H)	1-5/16
Load Capacity (Static)	4630lbs
Load Capacity at 4 km/h	3086lbs
Load Capacity at 6 km/h	2623lbs
Load Capacity at 10 km/h	2161lbs
Load Capacity at 16 km/h	1235lbs
Hardness Of Tread	92±5° Shore A
Temperature	-4°F to +158°F

Tread Pattern

Cast iron / spray-baked Wheel centre/ rim


black paint

Non-Marking Υ N/A Conductive Anti N/A Weight 10.4lbs Standard ISO22883

Advantages at a glance

Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

2D Dimensional Drawing of Drive Wheel

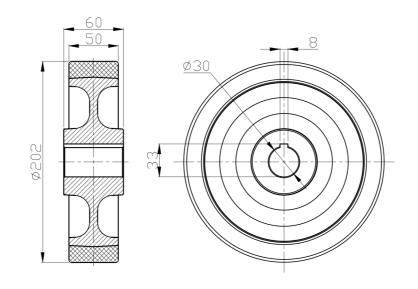

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.