

XPU Series

Wheel Diameter x Wheel Width 250 x 50mm

EAN

YJ-12036110200103

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.
 Excellent resistance to chemicals, solvents, and corrosion.
 Suitable for Forklift Trucks, Electric Stackers, Heavy duty machines, AGVs, and automated industrial applications.
 XPU Burgundy

Wheel Center: Iron core

Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.



Picture may differ from original product


Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial	
Wheel Diameter (D)	250mm
Wheel Width (T2)	50mm
Wheel installation — Hub Lenth (T1)	46mm
Wheel center-bore diameter (d)	50mm
Wheel Mounting Bolt Hole PCD Diameter	— mm
Wheel Mounting Bolt Hole PCD	75mm
# Of Wheel mounting bolt boles	—
Wheel mounting bolt hole (M)	8
Number of wheel mounting bolt holes	6
Load Capacity (Static)	2250kgs
Load Capacity at 4 km/h	1500kgs
Load Capacity at 6 km/h	1275kgs
Load Capacity at 10 km/h	1050kgs
Load Capacity at 16 km/h	600kgs
Hardness Of Tread	92±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	8.65kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • • ○

2D Dimensional Drawing of Drive Wheel

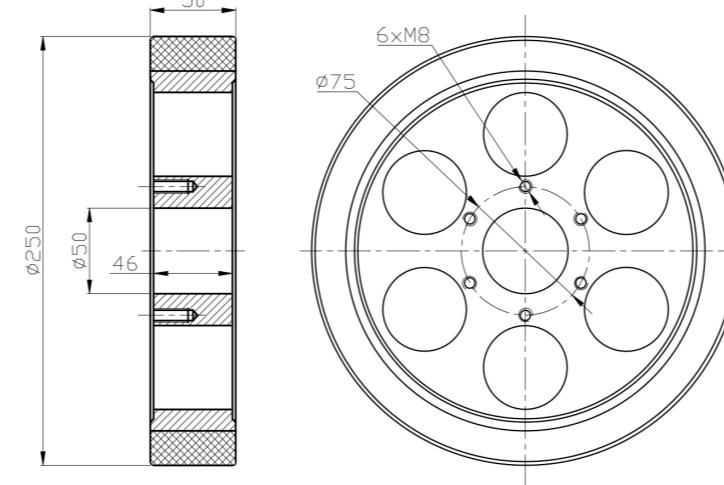

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com