

XPU Series

Wheel Diameter x Wheel Width 250 x 82mm

EAN

YJ-12036111336201

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.
 Excellent resistance to chemicals, solvents, and corrosion.
 Suitable for Forklift Trucks, Electric Stackers, Heavy duty machines, AGVs, and automated industrial applications.
 XPU, burgundy, Wheel Tread profile: Crown, machined with straight and V-grooved textures.
 Increased ground grip, effectively improving anti-slip performance.



Wheel Center: cast iron core

Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter (D) 10 "

Wheel Width (T2) 3-1/4

Wheel installation — Hub Length (T1) —

Wheel center-bore diameter (d) 3-3/16 "

Wheel Mounting Bolt Hole PCD Diameter 3/4 "

Wheel Mounting Bolt Hole PCD 4-1/2 "

Of Wheel mounting bolt holes 5

Wheel mounting bolt hole (M) —

Number of wheel mounting bolt holes —

Load Capacity (Static) 5291lbs

Load Capacity at 4 km/h 3527lbs

Load Capacity at 6 km/h 2998lbs

Load Capacity at 10 km/h 2469lbs

Load Capacity at 16 km/h 1411lbs

Hardness Of Tread 92±5° Shore A

Temperature -4°F to +158°F

Tread Pattern Straight lines + V-lines

Wheel centre/ rim Cast iron / spray-baked

black paint

Non-Marking Y

Conductive N/A

Anti N/A


Weight 15.8lbs

Standard ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • • ○

2D Dimensional Drawing of Drive Wheel

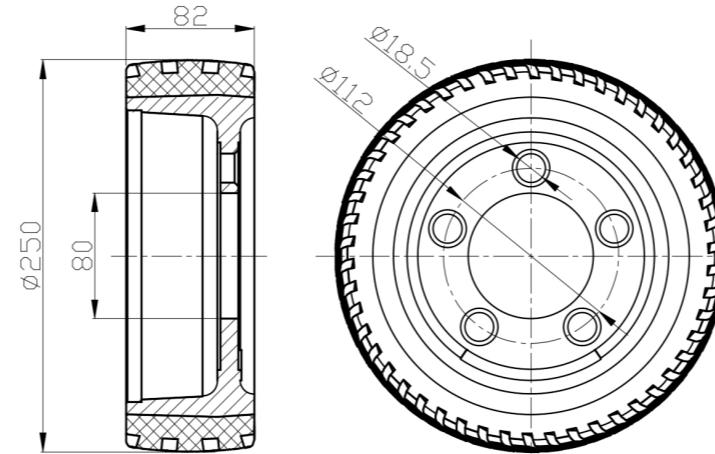

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com