

XPU Series

Wheel Diameter × Wheel Width 300 x 120mm


EAN

YJ-12036112480303

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.  
Excellent resistance to chemicals, solvents, and corrosion.  
Suitable for Forklift Trucks, electric Forklift Trucks, Heavy duty machines, AGVs, and automated industrial applications.  
XPU Burgundy

Wheel Center: Iron core  
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

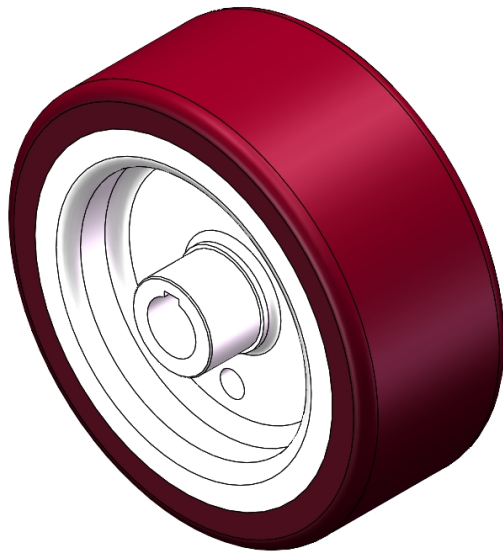

Picture may differ from original product


Technical Data

|                                                                        |                      |
|------------------------------------------------------------------------|----------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                      |
| Wheel Diameter (D)                                                     | 11-13/16 "           |
| Wheel Width (T2)                                                       | 4-3/4 "              |
| Wheel installation — Hub Lenth (T1)                                    | 5-9/16 "             |
| Wheel Mounting Bore Diameter                                           | 1-5/8 "              |
| Keyway Width                                                           | 1/2 "                |
| Wheel Keyway Depth (H)                                                 | 1-3/4                |
| Load Capacity (Static)                                                 | 8929lbs              |
| Load Capacity at 4 km/h                                                | 5952lbs              |
| Load Capacity at 6 km/h                                                | 5060lbs              |
| Load Capacity at 10 km/h                                               | 4167lbs              |
| Load Capacity at 16 km/h                                               | 2381lbs              |
| Hardness Of Tread                                                      | 92±5° Shore A        |
| Temperature                                                            | -4°F to +158°F       |
| Tread Pattern                                                          | —                    |
| Wheel centre/ rim                                                      | Iron core/galvanized |
| Non-Marking                                                            | Y                    |
| Conductive                                                             | N/A                  |
| Anti                                                                   | N/A                  |
| Weight                                                                 | 68.9lbs              |
| Standard                                                               | ISO22883             |

Advantages at a glance

|                            |             |
|----------------------------|-------------|
| Rolling Resistance         | ● ● ● ● ●   |
| Operating Noise            | ● ● ● ● ●   |
| Floor Surface Preservation | ● ● ● ● ● ○ |

2D Dimensional Drawing of Drive Wheel

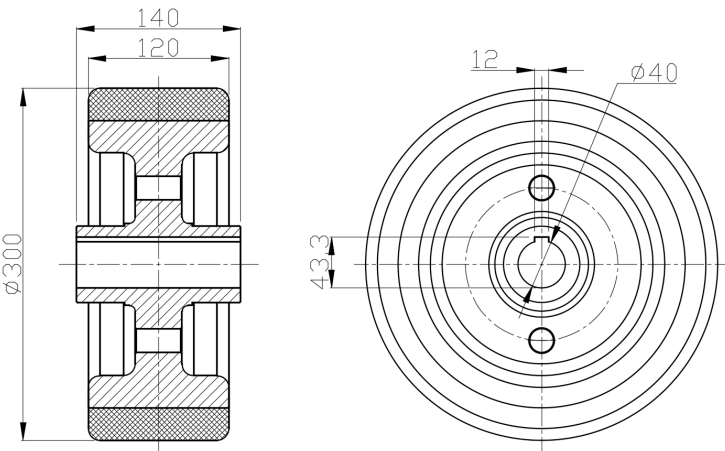

\* For any deviation between metric and imperial spec, please refer to the metric spec.