


## XPU Series

Wheel Diameter x Wheel Width 300 x 135mm

EAN

YJ-12036112530103

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.  
 Excellent resistance to chemicals, solvents, and corrosion.  
 Suitable for Forklift Trucks, Electric Stackers, Heavy duty machines, AGVs, and automated industrial applications.  
 XPU, Burgundy

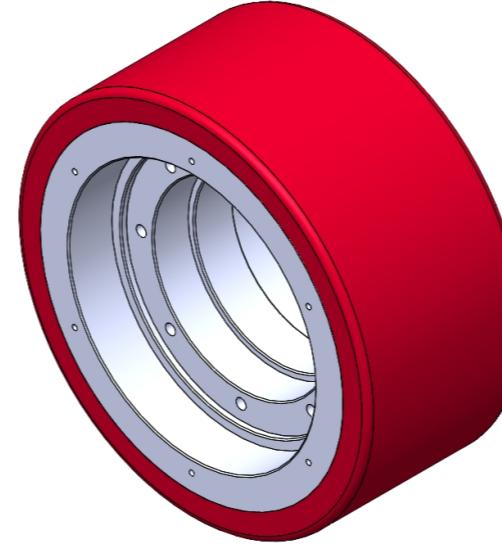

Wheel Center: Iron core  
 Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

Picture may differ from original product


## Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial	
Wheel Diameter (D)	300mm
Wheel Width (T2)	135mm
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	150mm
Wheel Mounting Bolt Hole PCD Diameter	12mm
Wheel Mounting Bolt Hole PCD	170mm
# Of Wheel mounting bolt boles	2
Wheel mounting bolt hole (M)	10
Number of wheel mounting bolt holes	8
Load Capacity (Static)	4050kgs
Load Capacity at 4 km/h	2700kgs
Load Capacity at 6 km/h	2295kgs
Load Capacity at 10 km/h	1890kgs
Load Capacity at 16 km/h	1080kgs
Hardness Of Tread	92±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	35.38kgs
Standard	ISO22883

## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • • ○

## 2D Dimensional Drawing of Drive Wheel

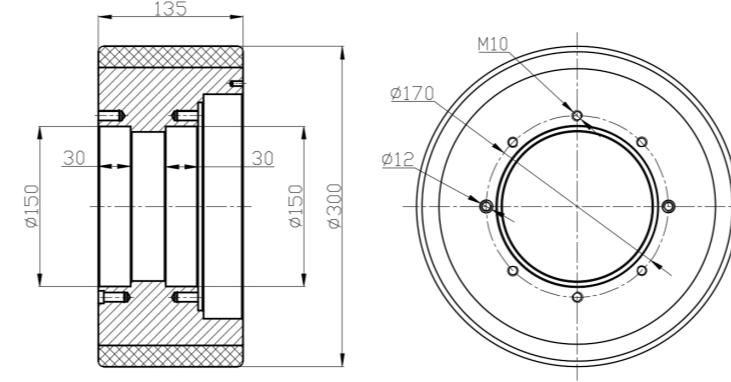

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com