# **Product Information Sheet**

# **XPU Series**

Wheel Diameter × Wheel Width 330 x 142mm

EAN

YJ-12036113586101

Excellent Mechanical Properties, maintaining Heavy Load during high-speed movement; good wear resistance; not easily deformed.


Excellent resistance to chemicals, solvents, and corrosion.

Suitable for Forklift Trucks, electric Forklift Trucks, Heavy duty machines, AGVs, and automated industrial applications. XPU Orange

Wheel Center: cast iron core

Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.



Dersheng Casters Keep Rolling

Picture may differ from original product

#### **Technical Data**

<ul><li>Imperial O Metric</li><li>Wheel Diameter (D)</li></ul>	13
Wheel Width (T2)	5-5/8
Wheel installation — Hub Lenth (T1)	_
Wheel center-bore diameter (d)	_
Wheel Mounting Bolt Hole PCD Diameter	11/16 "
Wheel Mounting Bolt Hole PCD	4-11/16 "
# Of Wheel mounting bolt boles	6
Wheel mounting bolt hole (M)	_
Number of wheel mounting bolt holes	_
Load Capacity (Static)	7275lbs
Load Capacity at 4 km/h	4850lbs
Load Capacity at 6 km/h	4123lbs
Load Capacity at 10 km/h	3395lbs

1940lbs

92±5° Shore A

-4°F to +158°F

black paint

Υ

N/A

N/A

47.8lbs

ISO22883

Cast iron / spray-baked

Hardness Of Tread
Temperature

Load Capacity at 16 km/h

Wheel centre/ rim

Tread Pattern

Standard

Non-Marking
Conductive
Anti
Weight

### Advantages at a glance


Rolling Resistance

Operating Noise

Floor Surface Preservation

• • • • •

# 2D Dimensional Drawing of Drive Wheel

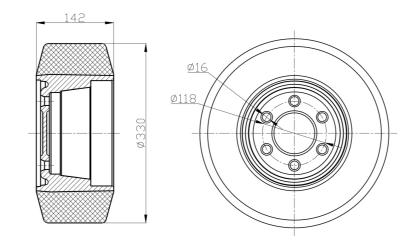

st For any deviation between metric and imperial spec, please refer to the metric spec.