

## QPU Series

Wheel Diameter x Wheel Width 150 x 40mm

EAN


YJ-12036306150103

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.

Excellent Hydrolysis Resistance.

Suitable for tropical regions and humid working environments.

QPU, Blue

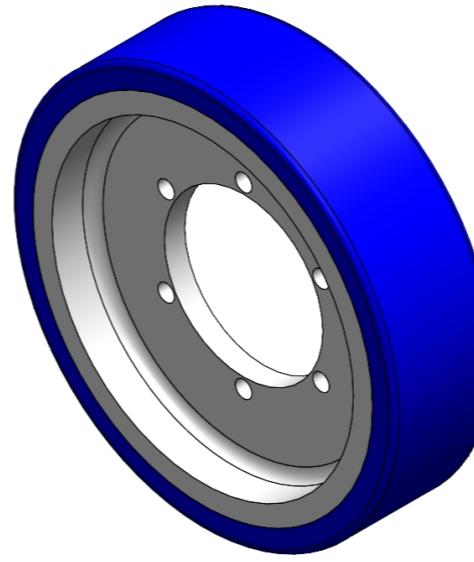

Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


## Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial
Wheel Diameter (D) 150mm
Wheel Width (T2) 40mm
Wheel installation — Hub Lenth (T1) 8mm
Wheel center-bore diameter (d) 62mm
Wheel Mounting Bolt Hole PCD Diameter 6.5 mm
Wheel Mounting Bolt Hole PCD 70mm
# Of Wheel mounting bolt boles 6
Wheel mounting bolt hole (M) —
Number of wheel mounting bolt holes —
Load Capacity (Static) 720kgs
Load Capacity at 4 km/h 480kgs
Load Capacity at 6 km/h 408kgs
Load Capacity at 10 km/h 336kgs
Load Capacity at 16 km/h 192kgs
Hardness Of Tread 87±5° Shore A
Temperature -20°C to +70°C
Tread Pattern —
Wheel centre/ rim Iron core/galvanized
Non-Marking Y
Conductive N/A
Anti N/A
Weight 1.60kgs
Standard ISO22883

## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

## 2D Dimensional Drawing of Drive Wheel

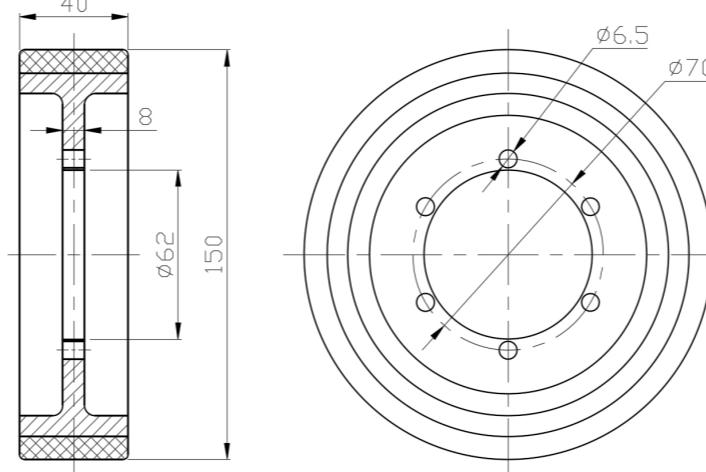

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com