

QPU Series

Wheel Diameter x Wheel Width 150 x 40mm

EAN

YJ-12036306180101

It has good elasticity, reduces pushing resistance, and improves machine controllability; good wear resistance.
It has excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU gray surface with machined straight and V-patterns.
Increases grip on the ground and effectively improves anti-slip ability.

Wheel Center: cast iron

Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.



Picture may differ from original product


Technical Data

<input checked="" type="radio"/> Metric <input type="radio"/> Imperial	
Wheel Diameter (D)	150mm
Wheel Width (T2)	40mm
Wheel installation — Hub Lenth (T1)	8mm
Wheel center-bore diameter (d)	50mm
Wheel Mounting Bolt Hole PCD Diameter	6.5mm
Wheel Mounting Bolt Hole PCD	70mm
# Of Wheel mounting bolt boles	6
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	630kgs
Load Capacity at 4 km/h	420kgs
Load Capacity at 6 km/h	357kgs
Load Capacity at 10 km/h	168kgs
Load Capacity at 16 km/h	168kgs
Hardness Of Tread	77±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	Straight lines + V-lines
Wheel centre/ rim	Iron core/galvanized
Non-Marking	N/A
Conductive	N/A
Anti	N/A
Weight	1.33kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • •

2D Dimensional Drawing of Drive Wheel

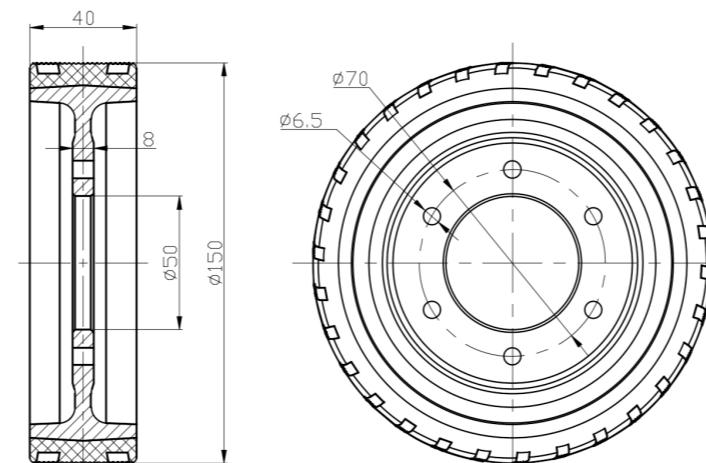

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com