

## QPU Series

Wheel Diameter × Wheel Width 150 x 40mm

EAN

YJ-12036306186201

It has good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.  
It has excellent Hydrolysis Resistance.  
Suitable for tropical regions and humid working environments.  
QPU Blue

Wheel Center: cast iron core  
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.



Picture may differ from original product

### Technical Data


Metric  Imperial

Wheel Diameter (D)	150mm
Wheel Width (T2)	40mm
Wheel installation — Hub Lenth (T1)	8mm
Wheel center-bore diameter (d)	62mm
Wheel Mounting Bolt Hole PCD Diameter	6.5mm
Wheel Mounting Bolt Hole PCD	70mm
# Of Wheel mounting bolt boles	6
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	654kgs
Load Capacity at 4 km/h	436kgs
Load Capacity at 6 km/h	370kgs
Load Capacity at 10 km/h	305kgs
Load Capacity at 16 km/h	174kgs
Hardness Of Tread	85±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Cast iron / black paint
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	1.24kgs
Standard	ISO22883

### Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

### 2D Dimensional Drawing of Drive Wheel

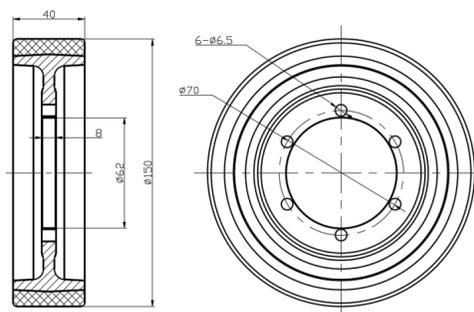

\* For any deviation between metric and imperial spec, please refer to the metric spec.