

## QPU Series

Wheel Diameter × Wheel Width 150 x 40mm


EAN

YJ-12036306186201

It has good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.  
It has excellent Hydrolysis Resistance.  
Suitable for tropical regions and humid working environments.  
QPU Blue

Wheel Center: cast iron core  
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

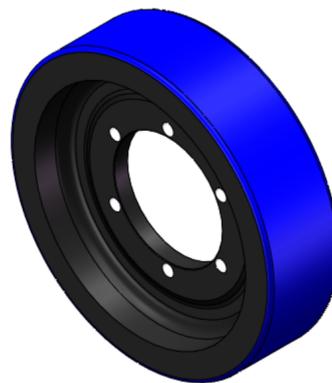

Picture may differ from original product


### Technical Data

<input checked="" type="radio"/> Imperial <input type="radio"/> Metric	
Wheel Diameter (D)	6 "
Wheel Width (T2)	1-5/8 "
Wheel installation — Hub Lenth (T1)	3/8 "
Wheel center-bore diameter (d)	2-1/2 "
Wheel Mounting Bolt Hole PCD Diameter	1/4 "
Wheel Mounting Bolt Hole PCD	2-13/16 "
# Of Wheel mounting bolt boles	6
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	1442lbs
Load Capacity at 4 km/h	961lbs
Load Capacity at 6 km/h	816lbs
Load Capacity at 10 km/h	672lbs
Load Capacity at 16 km/h	384lbs
Hardness Of Tread	85±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	—
Wheel centre/ rim	Cast iron / black paint
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	2.7lbs
Standard	ISO22883

### Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

### 2D Dimensional Drawing of Drive Wheel

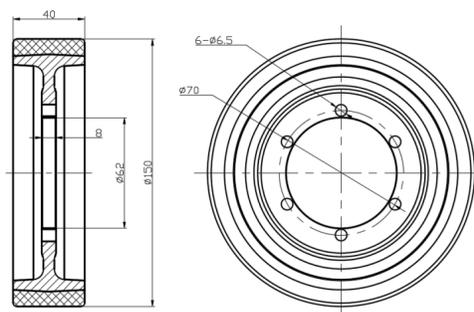

\* For any deviation between metric and imperial spec, please refer to the metric spec.