



QPU Series

Wheel Diameter × Wheel Width 200 × 50 mm


EAN

YJ-12036308200303

It has good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.
It has excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU Blue

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

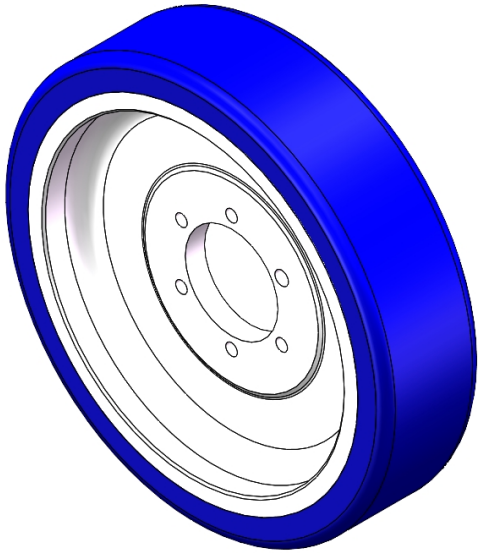

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	200mm
Wheel Width (T2)	50mm
Wheel installation — Hub Lenth (T1)	10mm
Wheel center-bore diameter (d)	48mm
Wheel Mounting Bolt Hole PCD Diameter	6mm
Wheel Mounting Bolt Hole PCD	60mm
# Of Wheel mounting bolt boles	6
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	960kgs
Load Capacity at 4 km/h	640kgs
Load Capacity at 6 km/h	544kgs
Load Capacity at 10 km/h	448kgs
Load Capacity at 16 km/h	256kgs
Hardness Of Tread	87±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	3.55kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Drive Wheel

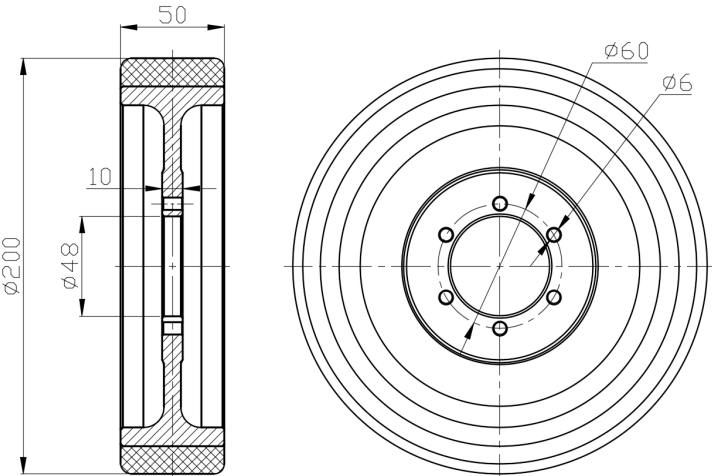

* For any deviation between metric and imperial spec, please refer to the metric spec.