



QPU Series

Wheel Diameter × Wheel Width 200 × 50 mm


EAN

YJ-12036308206101

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU gray surface with machined random texture.
Increases grip on the ground and effectively improves anti-slip ability.

Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

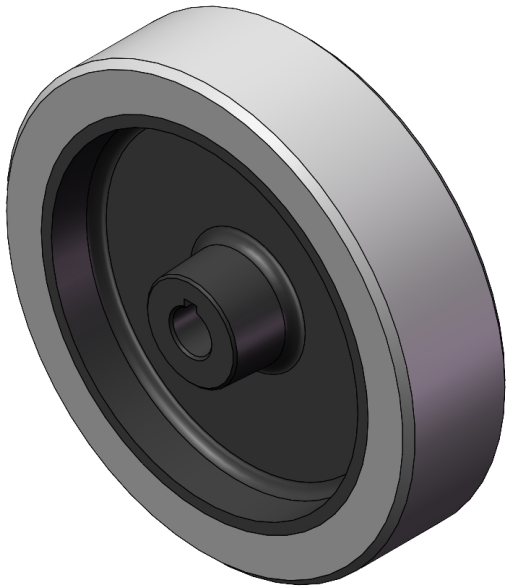

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	200mm
Wheel Width (T2)	50mm
Wheel installation — Hub Lenth (T1)	51mm
Wheel Mounting Bore Diameter	19mm
Keyway Width	6mm
Wheel Keyway Depth (H)	22.6mm
Load Capacity (Static)	630kgs
Load Capacity at 4 km/h	945kgs
Load Capacity at 6 km/h	630kgs
Load Capacity at 10 km/h	535.5kgs
Load Capacity at 16 km/h	252kgs
Hardness Of Tread	77±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	garbled text pattern
Wheel centre/ rim	Cast iron / spray-baked black paint
Non-Marking	N/A
Conductive	N/A
Anti	N/A
Weight	3.11kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Drive Wheel

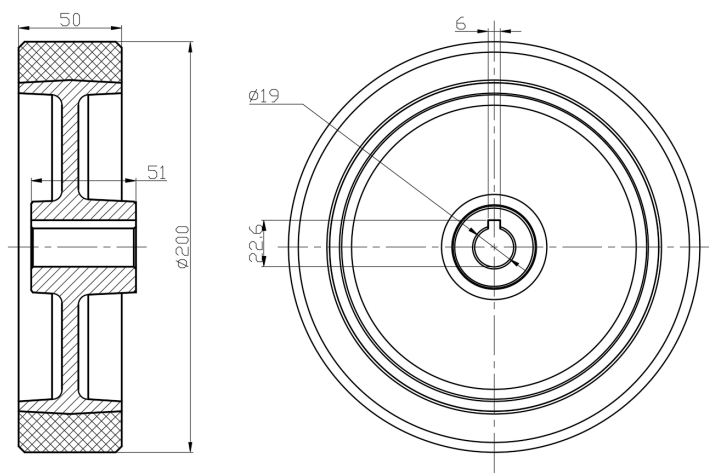

* For any deviation between metric and imperial spec, please refer to the metric spec.