



QPU Series


Wheel Diameter × Wheel Width 200 x 60mm

EAN

YJ-12036308230103

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU blue, machined diamond texture.
Increases grip on the ground, effectively improving anti-slip ability.

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane

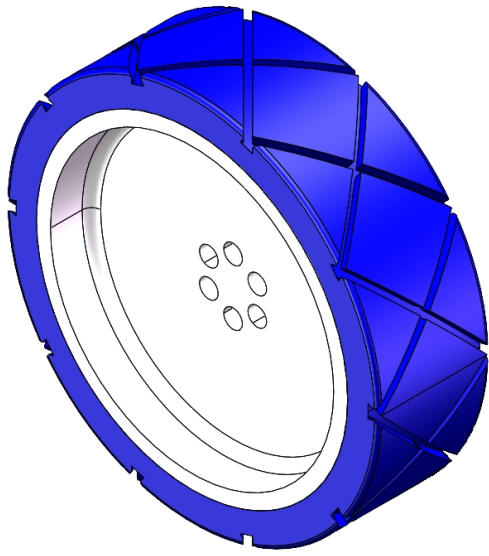

Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter (D)	8 "
Wheel Width (T2)	2-7/16 "
Wheel installation — Hub Lenth (T1)	13mm
Wheel center-bore diameter (d)	—
Wheel Mounting Bolt Hole PCD Diameter	1/4 "
Wheel Mounting Bolt Hole PCD	1-3/16 "
# Of Wheel mounting bolt boles	6
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	2116lbs
Load Capacity at 4 km/h	1411lbs
Load Capacity at 6 km/h	1199lbs
Load Capacity at 10 km/h	988lbs
Load Capacity at 16 km/h	256kgs
Hardness Of Tread	87±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	菱形纹
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	9.8lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Drive Wheel

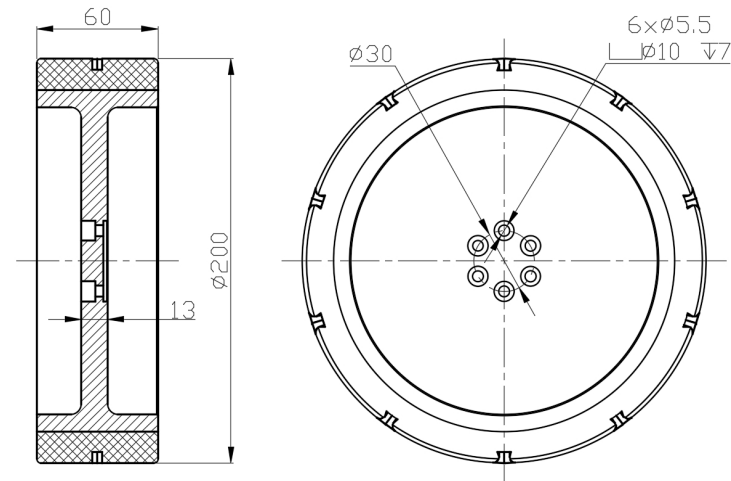

* For any deviation between metric and imperial spec, please refer to the metric spec.