

## QPU Series


Wheel Diameter × Wheel Width 250 x 58mm

EAN

YJ-12036310230103

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.  
 Excellent Hydrolysis Resistance.  
 Suitable for tropical regions and humid working environments.  
 QPU Blue

Wheel Center: Iron core  
 Wheel Tread: High-quality polyurethane

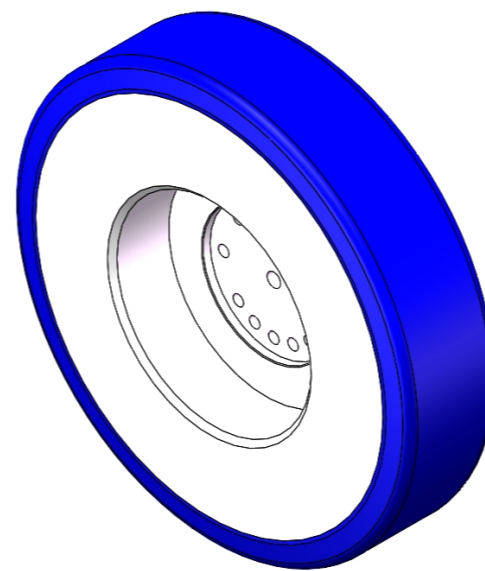

Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


### Technical Data

<input checked="" type="radio"/> Imperial <input type="radio"/> Metric	
Wheel Diameter (D)	10 "
Wheel Width (T2)	2-5/16
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	4 "
Wheel Mounting Bolt Hole PCD Diameter	1/4 "
Wheel Mounting Bolt Hole PCD	2-1/2 "
# Of Wheel mounting bolt boles	12
Wheel mounting bolt hole (M)	12
Number of wheel mounting bolt holes	2
Load Capacity (Static)	2150lbs
Load Capacity at 4 km/h	1433lbs
Load Capacity at 6 km/h	1218lbs
Load Capacity at 10 km/h	1003lbs
Load Capacity at 16 km/h	573lbs
Hardness Of Tread	87±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	—
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	31.1lbs
Standard	ISO22883

### Advantages at a glance

Rolling Resistance	•••••
Operating Noise	•••••
Floor Surface Preservation	•••••

### 2D Dimensional Drawing of Drive Wheel

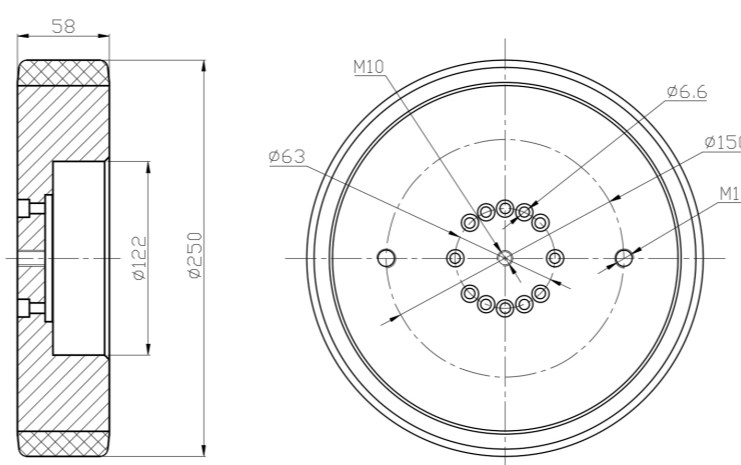

\* For any deviation between metric and imperial spec, please refer to the metric spec.