



QPU Series

Wheel Diameter × Wheel Width 250 x 82mm


EAN

YJ-12036311336201

It has good elasticity, reduces pushing resistance, improves machine tool operability, and has good wear resistance.
It has excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU, gray, Wheel Tread profile: Crown

Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

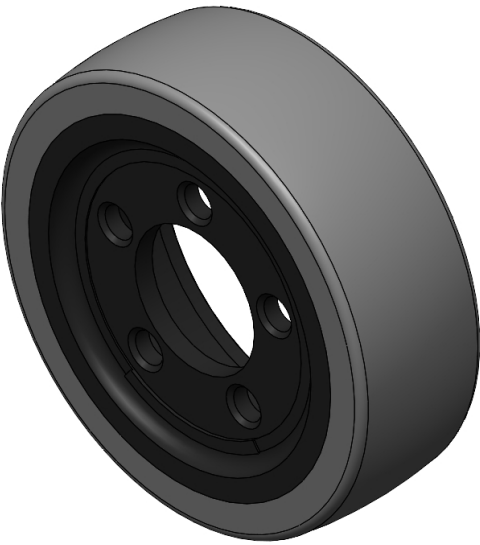

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter (D)	10 "
Wheel Width (T2)	3-1/4
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	3-3/16 "
Wheel Mounting Bolt Hole PCD Diameter	3/4 "
Wheel Mounting Bolt Hole PCD	4-1/2 "
# Of Wheel mounting bolt boles	5
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	3175lbs
Load Capacity at 4 km/h	2116lbs
Load Capacity at 6 km/h	1799lbs
Load Capacity at 10 km/h	1482lbs
Load Capacity at 16 km/h	847lbs
Hardness Of Tread	77±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	—
Wheel centre/ rim	Cast iron / spray-baked black paint
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	16.0lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Drive Wheel

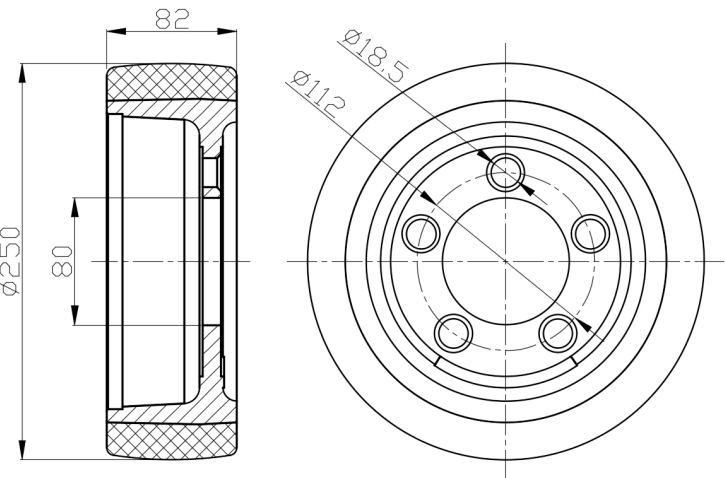

* For any deviation between metric and imperial spec, please refer to the metric spec.