



QPU Series

Wheel Diameter × Wheel Width 140 x 58mm

EAN

YJ-12036355230703

Good elasticity, reduces pushing resistance, improves machine maneuverability, and has good wear resistance.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU, gray, Wheel Tread profile: Crown, machined straight grain.
Increases grip on the ground and effectively improves anti-slip ability.

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane



Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter (D)	5-9/16
Wheel Width (T2)	2-5/16
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	4-1/2 "
Wheel Mounting Bolt Hole PCD Diameter	—
Wheel Mounting Bolt Hole PCD	4-11/16 "
# Of Wheel mounting bolt boles	—
Wheel mounting bolt hole (M)	4
Number of wheel mounting bolt holes	6
Load Capacity (Static)	265lbs
Load Capacity at 4 km/h	176lbs
Load Capacity at 6 km/h	150lbs
Load Capacity at 10 km/h	123lbs
Load Capacity at 16 km/h	71lbs
Hardness Of Tread	77±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	Straight lines
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	3.0lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Drive Wheel

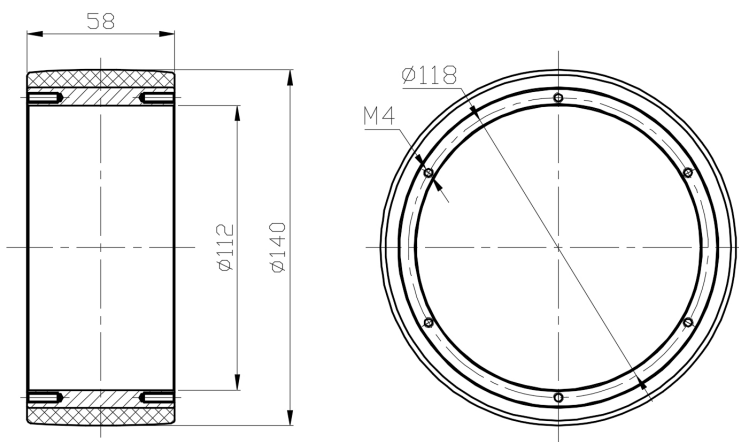

* For any deviation between metric and imperial spec, please refer to the metric spec.