

QPU Series

Wheel Diameter × Wheel Width 220 x 50mm


EAN

YJ-12036358200203

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU gray surface with machined random texture.
Increases grip on the ground, effectively improving anti-slip ability.

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

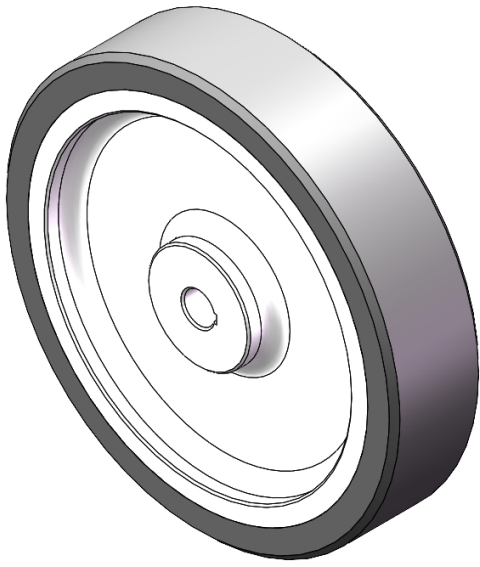

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	220mm
Wheel Width (T2)	50mm
Wheel installation — Hub Lenth (T1)	50mm
Wheel Mounting Bore Diameter	17mm
Keyway Width	5mm
Wheel Keyway Depth (H)	19mm
Load Capacity (Static)	900kgs
Load Capacity at 4 km/h	600kgs
Load Capacity at 6 km/h	510kgs
Load Capacity at 10 km/h	420kgs
Load Capacity at 16 km/h	240kgs
Hardness Of Tread	77±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	garbled text pattern
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	6.96kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Drive Wheel

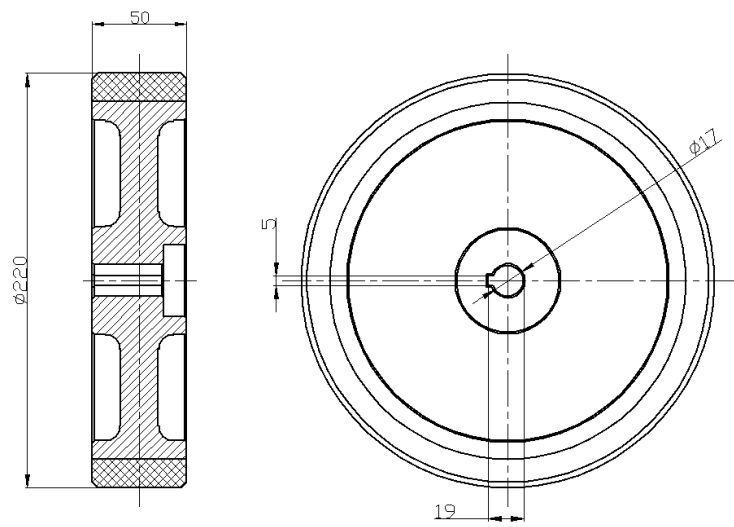

* For any deviation between metric and imperial spec, please refer to the metric spec.