



QPU Series

Wheel Diameter × Wheel Width 245 x 70mm


EAN

YJ-12036359280103

It has good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.
It has excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU Gray

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

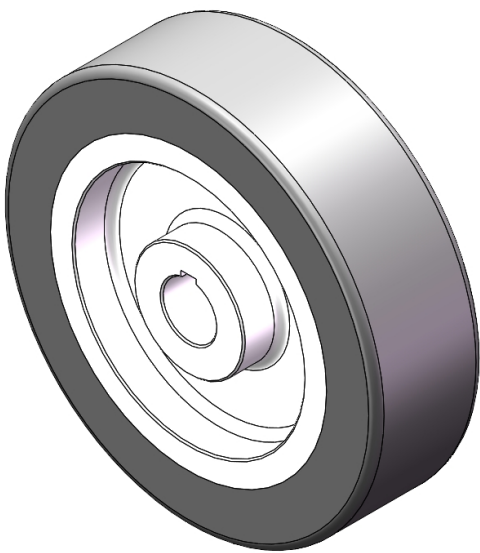

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	245mm
Wheel Width (T2)	70mm
Wheel installation — Hub Lenth (T1)	70mm
Wheel Mounting Bore Diameter	35mm
Keyway Width	10mm
Wheel Keyway Depth (H)	38.3mm
Load Capacity (Static)	2400kgs
Load Capacity at 4 km/h	1600kgs
Load Capacity at 6 km/h	1360kgs
Load Capacity at 10 km/h	1120kgs
Load Capacity at 16 km/h	640kgs
Hardness Of Tread	77±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	9.13kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Drive Wheel

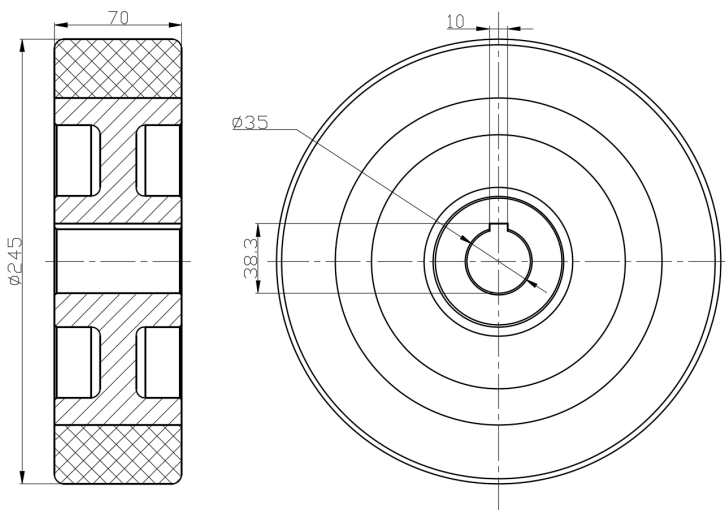

* For any deviation between metric and imperial spec, please refer to the metric spec.