

HPU Series

Wheel Diameter × Wheel Width 200 x 80mm


EAN

YJ-12037708330303

Excellent Mechanical Properties and wear resistance  
Excellent resistance to chemicals and corrosion  
Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers  
HPU Orange

Wheel Center: Iron core  
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.

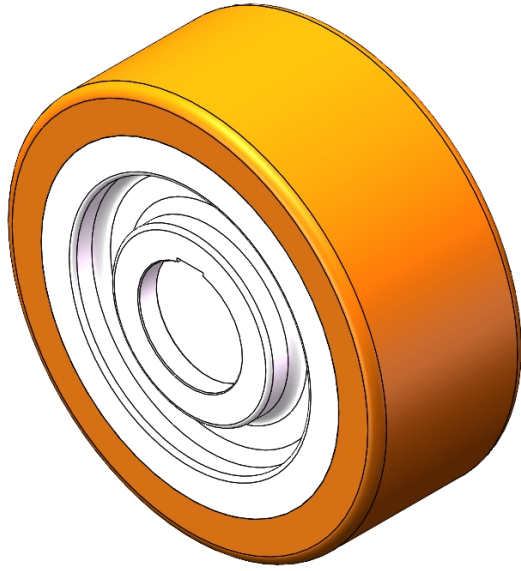

Picture may differ from original product


Technical Data

|                                                                        |                          |
|------------------------------------------------------------------------|--------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                          |
| Wheel Diameter (D)                                                     | 200mm                    |
| Wheel Width (T2)                                                       | 80mm                     |
| Wheel installation — Hub Lenth (T1)                                    | 80mm                     |
| Wheel Mounting Bore Diameter                                           | 55mm                     |
| Keyway Width                                                           | 14mm                     |
| Wheel Keyway Depth (H)                                                 | 16.3mm                   |
| Load Capacity (Static)                                                 | 1800kgs                  |
| Load Capacity at 4 km/h                                                | 1200kgs                  |
| Load Capacity at 6 km/h                                                | 1020kgs                  |
| Load Capacity at 10 km/h                                               | 840kgs                   |
| Load Capacity at 16 km/h                                               | 480kgs                   |
| Hardness Of Tread                                                      | 92±5° Shore A            |
| Temperature                                                            | -20°C to +70°C           |
| Tread Pattern                                                          | —                        |
| Wheel centre/ rim                                                      | Iron core/electroplation |
| Non-Marking                                                            | Y                        |
| Conductive                                                             | N/A                      |
| Anti                                                                   | N/A                      |
| Weight                                                                 | 9.29kgs                  |
| Standard                                                               | ISO22883                 |

Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

2D Dimensional Drawing of Drive Wheel

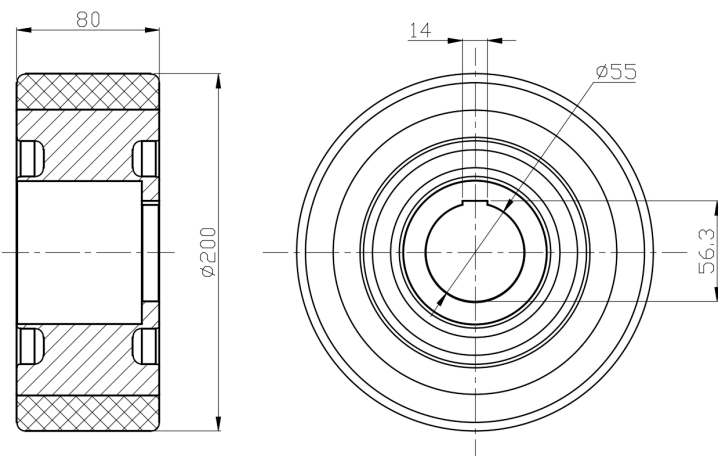

\* For any deviation between metric and imperial spec, please refer to the metric spec.