



HPU Series

Wheel Diameter × Wheel Width 230 x 70mm

EAN

YJ-12037709286125

Excellent Mechanical Properties and wear resistance
Excellent resistance to chemicals and corrosion
Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
HPU, orange-yellow

Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane



Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter (D)	9-1/8
Wheel Width (T2)	2-13/16 "
Wheel installation — Hub Lenth (T1)	3-5/16 "
Wheel center-bore diameter (d)	1-13/16 "
Wheel Mounting Bolt Hole PCD Diameter	9/16 "
Wheel Mounting Bolt Hole PCD	2-13/16 "
# Of Wheel mounting bolt boles	5
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	4299lbs
Load Capacity at 4 km/h	2866lbs
Load Capacity at 6 km/h	2436lbs
Load Capacity at 10 km/h	2006lbs
Load Capacity at 16 km/h	1146lbs
Hardness Of Tread	92±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	—
Wheel centre/ rim	Cast iron / spray-baked black paint
Non-Marking	Y
Conductive	N/A 10^6~10^9Ω
Anti	N/A
Weight	11.3lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Drive Wheel

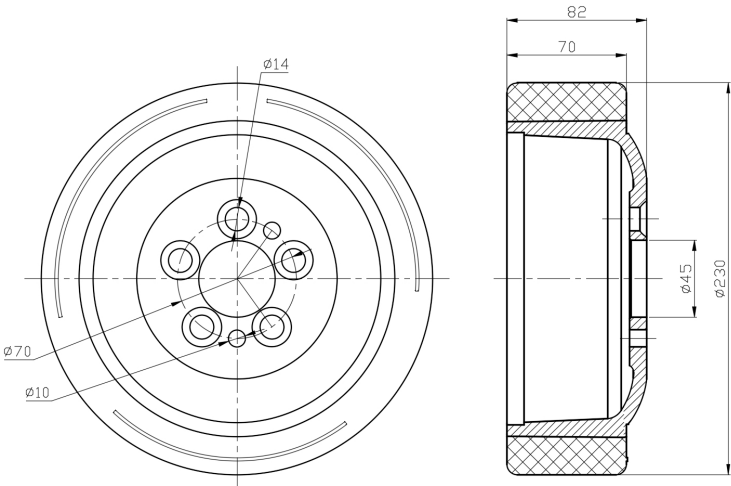

* For any deviation between metric and imperial spec, please refer to the metric spec.