



HPU Series


Wheel Diameter × Wheel Width 250 x 60mm

EAN

YJ-12037710230203

Excellent Mechanical Properties and wear resistance
Excellent resistance to chemicals and corrosion
Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
HPU, dark gray, with machined concave horizontal grooves
Increases grip on the ground, effectively improving anti-slip performance

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane

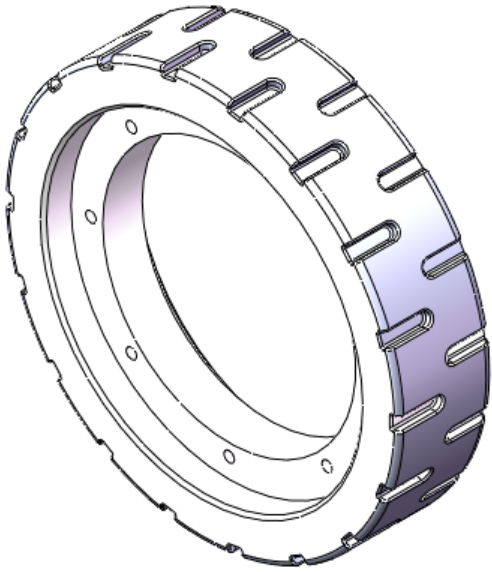

Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	250mm
Wheel Width (T2)	60mm
Wheel installation — Hub Lenth (T1)	25mm
Wheel center-bore diameter (d)	160mm
Wheel Mounting Bolt Hole PCD Diameter	6.5mm
Wheel Mounting Bolt Hole PCD	175mm
# Of Wheel mounting bolt boles	8
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	1350kgs
Load Capacity at 4 km/h	900kgs
Load Capacity at 6 km/h	765kgs
Load Capacity at 10 km/h	630kgs
Load Capacity at 16 km/h	360kgs
Hardness Of Tread	80±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	concave horizontal lines
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	5.78kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Drive Wheel

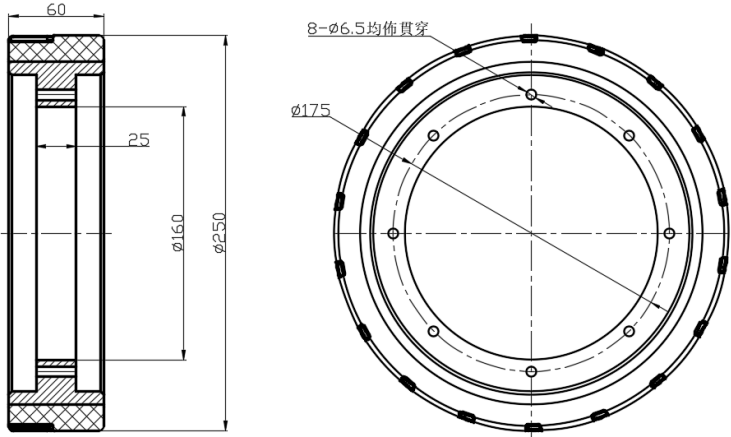

* For any deviation between metric and imperial spec, please refer to the metric spec.