



HPU Series


Wheel Diameter × Wheel Width 250 x 60mm

EAN

YJ-12037710230203

Excellent Mechanical Properties and wear resistance
Excellent resistance to chemicals and corrosion
Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
HPU, dark gray, with machined concave horizontal grooves
Increases grip on the ground, effectively improving anti-slip performance

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane

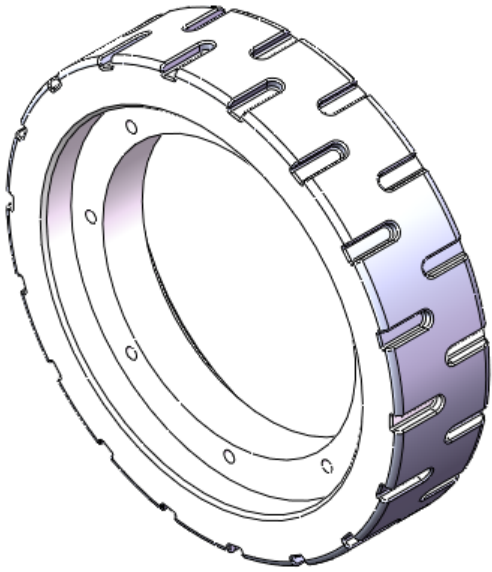

Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter (D)	10 "
Wheel Width (T2)	2-7/16 "
Wheel installation — Hub Lenth (T1)	1 "
Wheel center-bore diameter (d)	6-3/8 "
Wheel Mounting Bolt Hole PCD Diameter	1/4 "
Wheel Mounting Bolt Hole PCD	7 "
# Of Wheel mounting bolt boles	8
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	2976lbs
Load Capacity at 4 km/h	1984lbs
Load Capacity at 6 km/h	1687lbs
Load Capacity at 10 km/h	1389lbs
Load Capacity at 16 km/h	794lbs
Hardness Of Tread	80±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	concave horizontal lines
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	12.7lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Drive Wheel

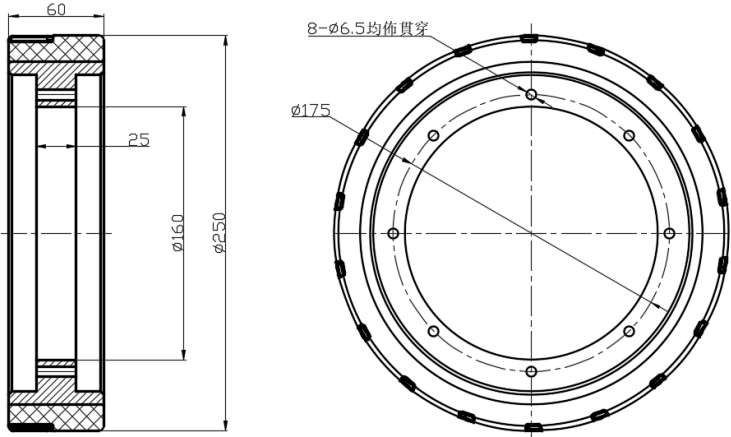

* For any deviation between metric and imperial spec, please refer to the metric spec.