



HPU Series


Wheel Diameter × Wheel Width 330 x 142mm

EAN

YJ-12037713586100

Excellent Mechanical Properties and wear resistance
Excellent resistance to chemicals and corrosion
Suitable for Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
HPU, orange-yellow

Wheel Center: cast iron core
Wheel Tread: High-quality polyurethane

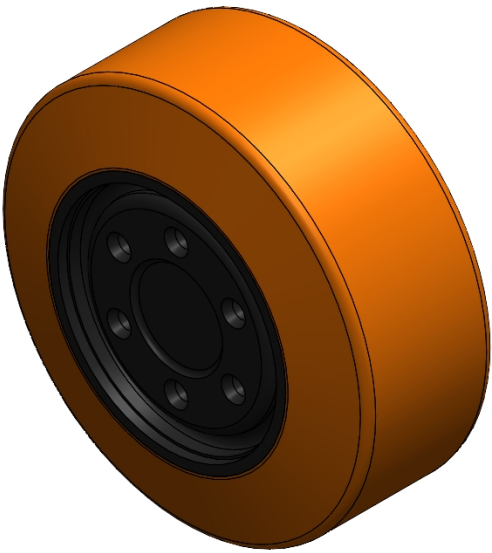

Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	330mm
Wheel Width (T2)	142mm
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	—
Wheel Mounting Bolt Hole PCD Diameter	16mm
Wheel Mounting Bolt Hole PCD	118mm
# Of Wheel mounting bolt boles	6
Wheel mounting bolt hole (M)	—
Number of wheel mounting bolt holes	—
Load Capacity (Static)	2970kgs
Load Capacity at 4 km/h	1980kgs
Load Capacity at 6 km/h	1683kgs
Load Capacity at 10 km/h	1386kgs
Load Capacity at 16 km/h	792kgs
Hardness Of Tread	92±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	—
Wheel centre/ rim	Cast iron / spray-baked black paint
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	22.05kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Drive Wheel

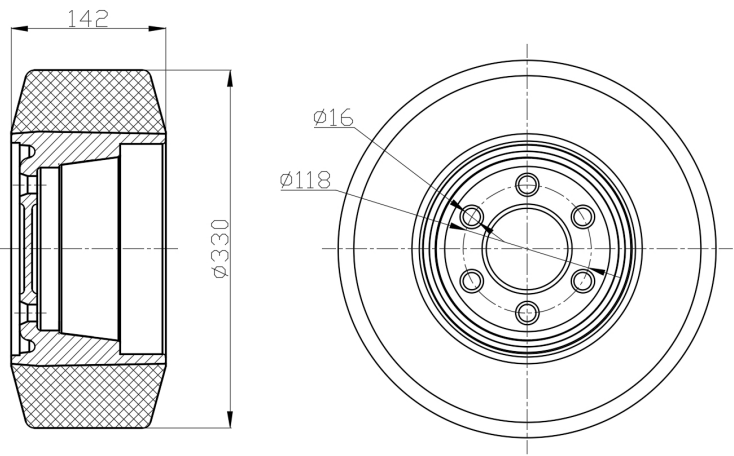

* For any deviation between metric and imperial spec, please refer to the metric spec.