



HPU Series

Wheel Diameter × Wheel Width 140 x 58mm

EAN

YJ-12037755230403

Excellent Mechanical Properties and wear resistance
Excellent resistance to chemicals and corrosion
Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
HPU, dark gray, surface machined with random texture A
Increases grip on the ground, effectively improving anti-slip ability

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane

Product descriptions are for reference only. The actual product shall prevail.



Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	140mm
Wheel Width (T2)	58mm
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	112mm
Wheel Mounting Bolt Hole PCD Diameter	—
Wheel Mounting Bolt Hole PCD	118mm
# Of Wheel mounting bolt boles	—
Wheel mounting bolt hole (M)	4
Number of wheel mounting bolt holes	6
Load Capacity (Static)	120kgs
Load Capacity at 4 km/h	80kgs
Load Capacity at 6 km/h	68kgs
Load Capacity at 10 km/h	56kgs
Load Capacity at 16 km/h	32kgs
Hardness Of Tread	92±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	Scrambled Pattern A
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A 10^6/~
	10^9/Ω
Anti	N/A
Weight	1.38kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Drive Wheel

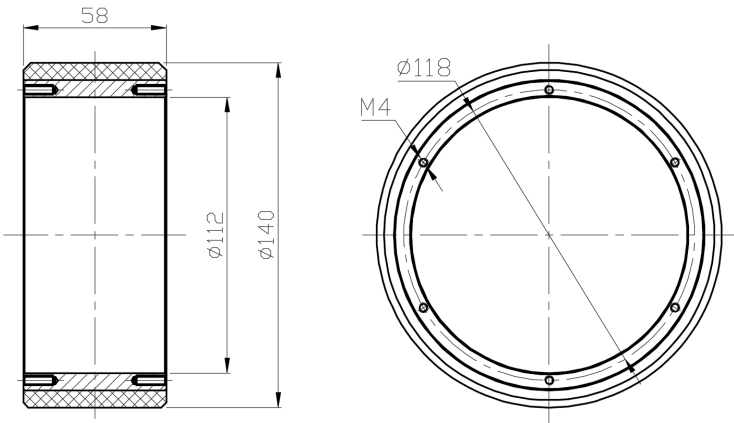

* For any deviation between metric and imperial spec, please refer to the metric spec.