



HPU Series

Wheel Diameter × Wheel Width 140 x 58mm

EAN

YJ-12037755230403

Excellent Mechanical Properties and wear resistance
Excellent resistance to chemicals and corrosion
Suitable for use in Forklift Trucks, Electric Stackers, AGVs, and floor scrubbers
HPU, dark gray, surface machined with random texture A
Increases grip on the ground, effectively improving anti-slip ability

Wheel Center: Iron core
Wheel Tread: High-quality polyurethane



Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter (D)	5-9/16
Wheel Width (T2)	2-5/16
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	4-1/2 "
Wheel Mounting Bolt Hole PCD Diameter	—
Wheel Mounting Bolt Hole PCD	4-11/16 "
# Of Wheel mounting bolt boles	—
Wheel mounting bolt hole (M)	4
Number of wheel mounting bolt holes	6
Load Capacity (Static)	265lbs
Load Capacity at 4 km/h	176lbs
Load Capacity at 6 km/h	150lbs
Load Capacity at 10 km/h	123lbs
Load Capacity at 16 km/h	71lbs
Hardness Of Tread	92±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	Scrambled Pattern A
Wheel centre/ rim	Iron core/galvanized
Non-Marking	Y
Conductive	N/A 10^6/~
	10^9/Ω
Anti	N/A
Weight	3.0lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • • •
Operating Noise	• • • • •
Floor Surface Preservation	• • • • •

2D Dimensional Drawing of Drive Wheel

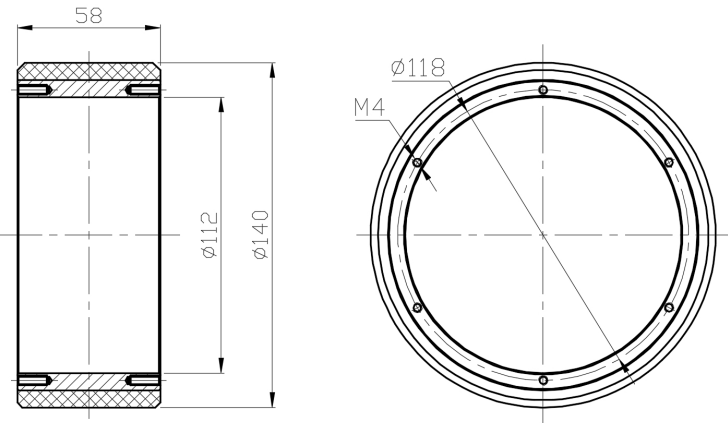

* For any deviation between metric and imperial spec, please refer to the metric spec.