


HPU Series

Wheel Diameter × Wheel Width 169 x 48mm

EAN

YJ-12037756180203

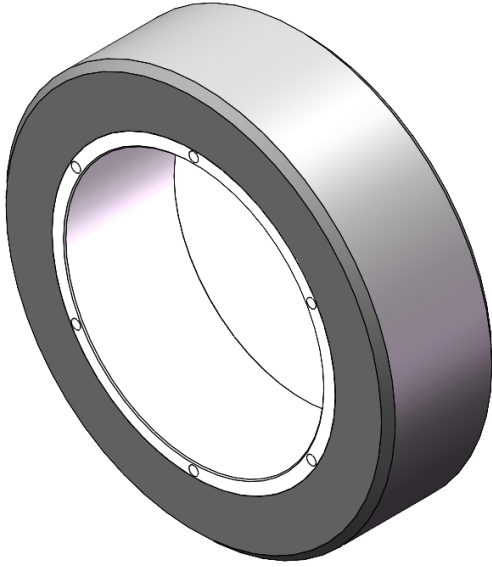

Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

|                                                                        |                |
|------------------------------------------------------------------------|----------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                |
| Wheel Diameter (D)                                                     | 169mm          |
| Wheel Width (T2)                                                       | 48mm           |
| Wheel installation — Hub Lenth (T1)                                    | —              |
| Wheel center-bore diameter (d)                                         | 112mm          |
| Wheel Mounting Bolt Hole PCD Diameter                                  | —              |
| Wheel Mounting Bolt Hole PCD                                           | 118mm          |
| # Of Wheel mounting bolt boles                                         | —              |
| Wheel mounting bolt hole (M)                                           | 4              |
| Number of wheel mounting bolt holes                                    | 12             |
| Load Capacity (Static)                                                 | 900kgs         |
| Load Capacity at 4 km/h                                                | 600kgs         |
| Load Capacity at 6 km/h                                                | 510kgs         |
| Load Capacity at 10 km/h                                               | 420kgs         |
| Load Capacity at 16 km/h                                               | 240kgs         |
| Hardness Of Tread                                                      | 92±5° Shore A  |
| Temperature                                                            | -20°C to +70°C |
| Tread Pattern                                                          | —              |
| Wheel centre/ rim                                                      |                |
| Non-Marking                                                            | Y              |
| Conductive                                                             | N/A            |
| Anti                                                                   | N/A            |
| Weight                                                                 | 1.45kgs        |
| Standard                                                               | ISO22883       |

Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

2D Dimensional Drawing of Drive Wheel

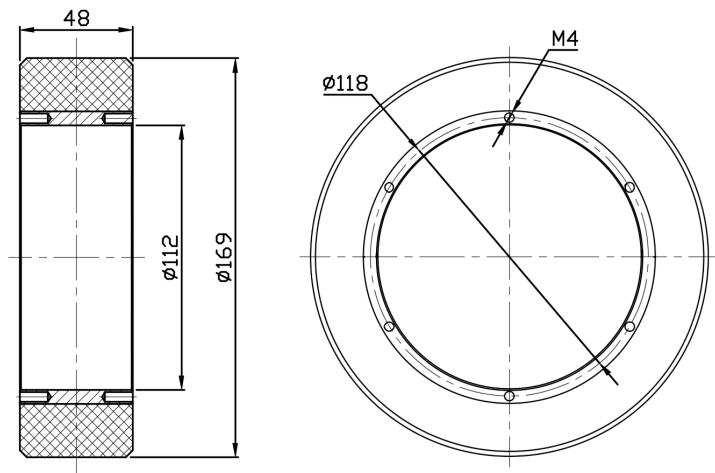

\* For any deviation between metric and imperial spec, please refer to the metric spec.