

ZQPU Series



Wheel Diameter × Wheel Width 62.5 x 20mm


EAN

YJ-12038052080599

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.  
Excellent Hydrolysis Resistance.  
Suitable for tropical regions and humid working environments.  
QPU brown Wheel Tread with arc shape.

Wheel Center: cast iron core  
Wheel Tread: High-quality polyurethane  
Bearing: Ball bearing

Drawings are for reference only and may differ from the product

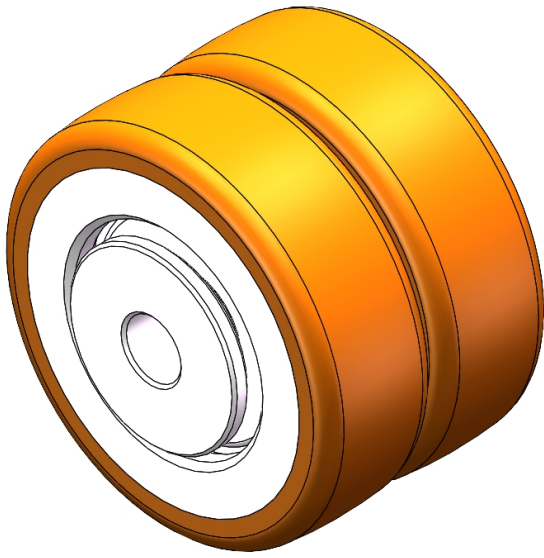

Picture may differ from original product


Technical Data

|                                                                        |                |
|------------------------------------------------------------------------|----------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                |
| Wheel Diameter(D)                                                      | 62.5mm         |
| Wheel Width(T2)                                                        | 41.5mm         |
|                                                                        |                |
| Wheel Bearing                                                          | Ball Bearing   |
| Axle Bore(d)                                                           | 10.2mm         |
| Axle Bore(S)                                                           | —              |
| Bearing Bore Depth(t)                                                  | —              |
| Hub Lenth(T1)                                                          | 46mm           |
| Hardness Of Tread                                                      | 92±5° Shore A  |
| Load Capacity (Dynamic)                                                | 450kgs         |
| Load Capacity (Static)                                                 | 675kgs         |
| Temperature                                                            | -20°C to +70°C |
| Electrical Conductivity                                                | N/A            |
| Anti-Static                                                            | N/A            |
| Weight                                                                 | 0.36kgs        |
| Standard                                                               | ISO22883       |

Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

2D Dimensional Drawing of Single Wheel

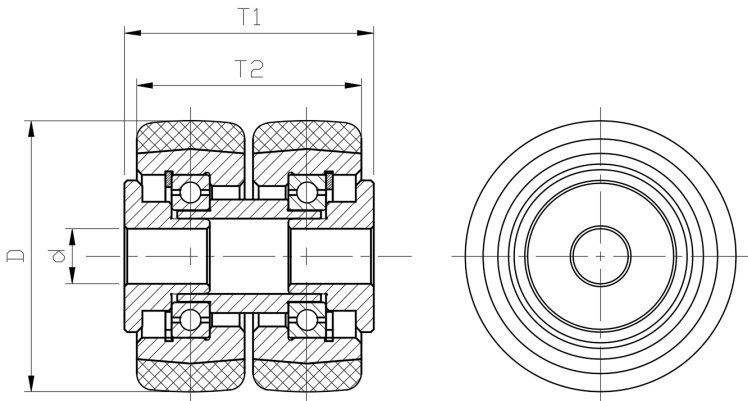

\* For any deviation between metric and imperial spec, please refer to the metric spec.