

AQPU Series



Wheel Diameter × Wheel Width 200 x 42mm

EAN

YJ-12038408180200

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU, black, surface machined with straight + diamond texture.
Increases grip on the ground, effectively improving anti-slip ability.

Wheel Center: Aluminum core
Wheel Tread: High-quality polyurethane



Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter (D)	200mm
Wheel Width (T2)	42mm
Wheel installation — Hub Lenth (T1)	40mm
Wheel center-bore diameter (d)	115mm
Wheel Mounting Bolt Hole PCD Diameter	11.5mm
Wheel Mounting Bolt Hole PCD	133mm
# Of Wheel mounting bolt boles	6
Wheel mounting bolt hole (M)	8
Number of wheel mounting bolt holes	6
Load Capacity (Static)	600kgs
Load Capacity at 4 km/h	400kgs
Load Capacity at 6 km/h	340kgs
Load Capacity at 10 km/h	280kgs
Load Capacity at 16 km/h	160kgs
Hardness Of Tread	77±5° Shore A
Temperature	-20°C to +70°C
Tread Pattern	Straight + diamond
Wheel centre/ rim	Aluminum core / black paint
Non-Marking	Y
Conductive	N/A 10^6/Ω ~10^8.5/Ω
Anti	N/A
Weight	1.64kgs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Drive Wheel

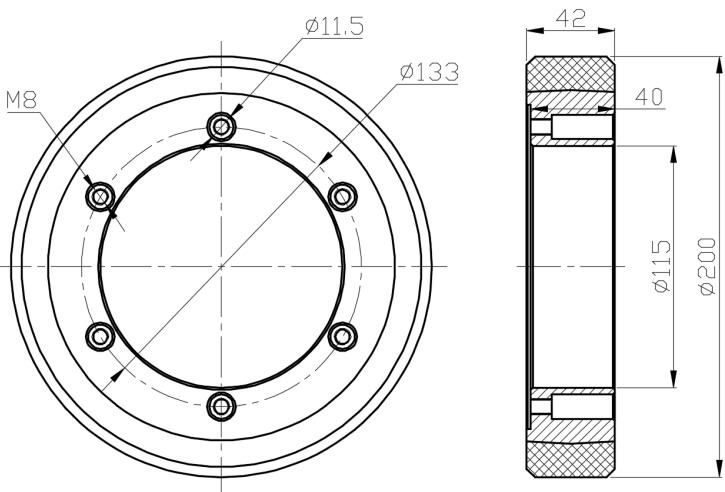

* For any deviation between metric and imperial spec, please refer to the metric spec.