

AQPU Series



Wheel Diameter × Wheel Width 200 x 42mm

EAN

YJ-12038408180200

Good elasticity, reduces pushing resistance, improves machine controllability, and has good wear resistance.
Excellent Hydrolysis Resistance.
Suitable for tropical regions and humid working environments.
QPU, black, surface machined with straight + diamond texture.
Increases grip on the ground, effectively improving anti-slip ability.

Wheel Center: Aluminum core
Wheel Tread: High-quality polyurethane



Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter (D)	8 "
Wheel Width (T2)	1-11/16 "
Wheel installation — Hub Lenth (T1)	1-5/8 "
Wheel center-bore diameter (d)	4-9/16 "
Wheel Mounting Bolt Hole PCD Diameter	1/2 "
Wheel Mounting Bolt Hole PCD	5-1/2 "
# Of Wheel mounting bolt boles	6
Wheel mounting bolt hole (M)	8
Number of wheel mounting bolt holes	6
Load Capacity (Static)	1323lbs
Load Capacity at 4 km/h	882lbs
Load Capacity at 6 km/h	750lbs
Load Capacity at 10 km/h	617lbs
Load Capacity at 16 km/h	353lbs
Hardness Of Tread	77±5° Shore A
Temperature	-4°F to +158°F
Tread Pattern	Straight + diamond
Wheel centre/ rim	Aluminum core / black paint
Non-Marking	Y
Conductive	N/A 10^6/Ω ~10^8.5/Ω
Anti	N/A
Weight	3.6lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ●

2D Dimensional Drawing of Drive Wheel

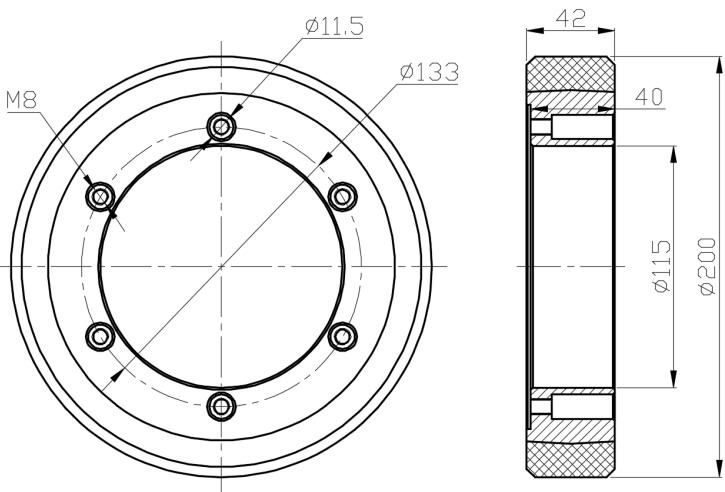

* For any deviation between metric and imperial spec, please refer to the metric spec.