

AHPU Series



Wheel Diameter × Wheel Width 300 x 90mm

EAN

YJ-12039612385114



Picture may differ from original product


Technical Data

|                                                                        |                |
|------------------------------------------------------------------------|----------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                |
| Wheel Diameter （D）                                                     | 10-3/8         |
| Wheel Width （T2）                                                       | 3-9/16 "       |
| Wheel installation — Hub Lenth (T1)                                    | —              |
| Wheel center-bore diameter (d)                                         | 2-9/16 "       |
| Wheel Mounting Bolt Hole PCD Diameter                                  | —              |
| Wheel Mounting Bolt Hole PCD                                           | —              |
| # Of Wheel mounting bolt boles                                         | —              |
| Wheel mounting bolt hole (M)                                           | —              |
| Number of wheel mounting bolt holes                                    | —              |
| Load Capacity (Static)                                                 | 4299lbs        |
| Load Capacity at 4 km/h                                                | 2866lbs        |
| Load Capacity at 6 km/h                                                | 2436lbs        |
| Load Capacity at 10 km/h                                               | 2006lbs        |
| Load Capacity at 16 km/h                                               | 1146lbs        |
| Hardness Of Tread                                                      | 92±5° Shore A  |
| Temperature                                                            | -4°F to +158°F |
| Tread Pattern                                                          | —              |
| Wheel centre/ rim                                                      |                |
| Non-Marking                                                            | Y              |
| Conductive                                                             | N/A            |
| Anti                                                                   | N/A            |
| Weight                                                                 | 26.3lbs        |
| Standard                                                               | ISO22883       |

Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

2D Dimensional Drawing of Drive Wheel

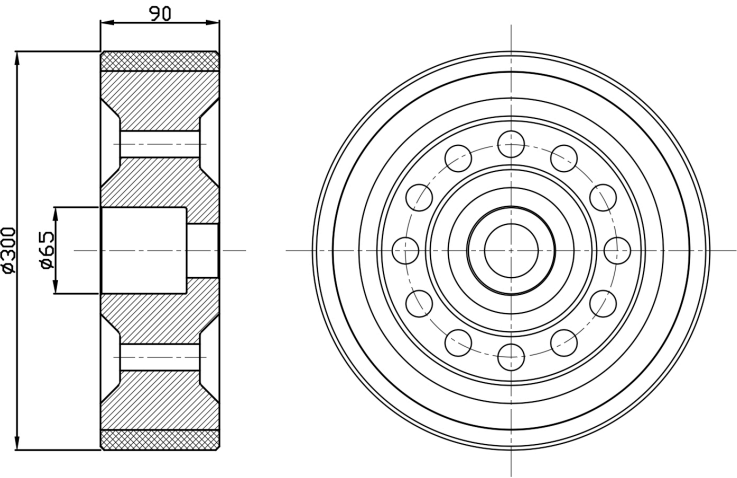

\* For any deviation between metric and imperial spec, please refer to the metric spec.