

## NBR Series

Wheel Diameter x Wheel Width 250 x 50mm

EAN

YJ-12040410206271

Made of High-Quality Resilient Rubber Features excellent handling comfort, good Floor Surface Preservation, and Shock-Absorbing. Excellent resistance to chemicals, solvents, and corrosion. Suitable for industrial and heavy-duty wheels. Rubber, Black, Curved Wheel Surface



Wheel Center: cast iron core

Outer packaging: rubber

Bearing: Ball bearing

Drawings are for reference only and may differ from the product

Picture may differ from original product

### Technical Data

Metric  Imperial

Wheel Diameter(D) 250mm

Wheel Width(T2) 50mm

Wheel Bearing Ball Bearing

Axle Bore(d) 25mm

Axle Bore(S) —

Bearing Bore Depth(t) —

Hub Length(T1) 50mm

Hardness Of Tread 85±5° Shore A

Load Capacity (Dynamic) 400kgs

Load Capacity (Static) 600kgs

Temperature -20°C to +80°C

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.59kgs

Standard ISO22883


### Advantages at a glance

Rolling Resistance • • • ○ ○

Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

### 2D Dimensional Drawing of Single Wheel

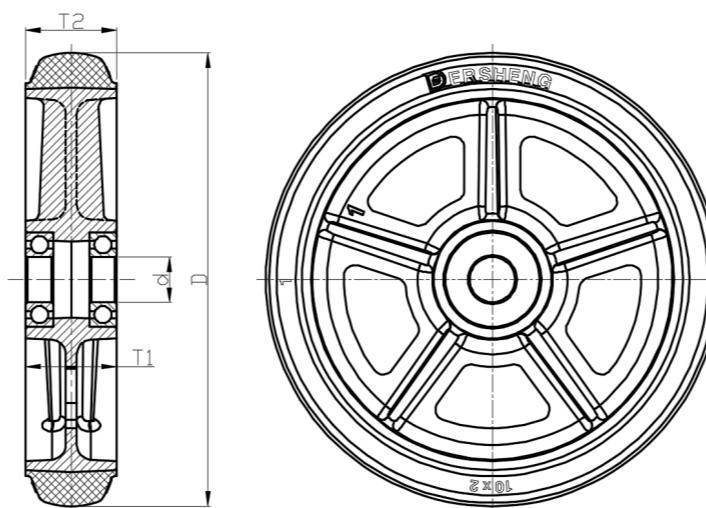

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com