

## NBR Series

Wheel Diameter x Wheel Width 250 x 50mm

EAN

YJ-12040410206601

Made of High-Quality Resilient Rubber Features excellent handling comfort, superior Floor Surface Preservation, and Shock-Absorbing. Excellent resistance to chemicals, solvents, and corrosion. Suitable for industrial and heavy-duty wheels. Rubber, Black, Curved Wheel Surface



Wheel Center: cast iron core

Outer packaging: rubber

Bearings: —

Drawings are for reference only and may differ from the product

Picture may differ from original product

### Technical Data

Imperial  Metric

Wheel Diameter(D) 10 "

Wheel Width(T2) 2 "

Wheel Bearing Without Bearing

Axle Bore(d) —

Axle Bore(S) 1-15/16 "

Bearing Bore Depth(t) 5/8 "

Hub Length(T1) 2 "

Hardness Of Tread 85±5° Shore A

Load Capacity (Dynamic) 882lbs

Load Capacity (Static) 1323lbs

Temperature -4°F to +176°F

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.2lbs

Standard ISO22883


### Advantages at a glance

Rolling Resistance ● ● ● ○ ○

Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ○

### 2D Dimensional Drawing of Single Wheel

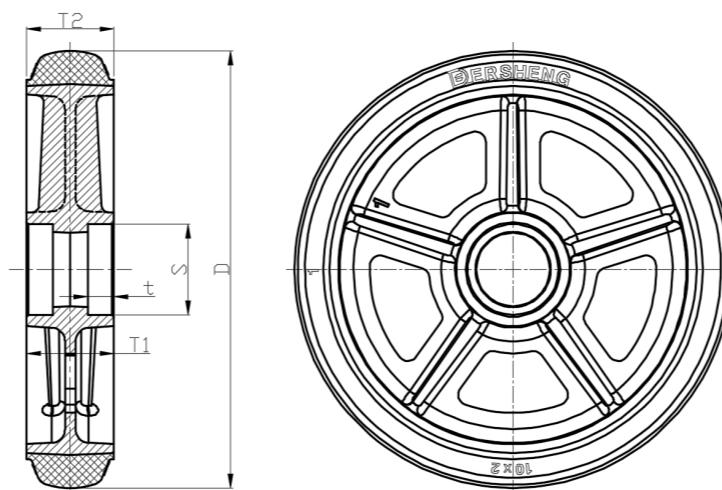

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com