

Rubber Series

Wheel Diameter × Wheel Width 250 x 70mm

EAN

YJ-12046210280101

Made of High-Quality Resilient Rubber Features excellent handling comfort, superior Floor Surface Preservation, and Shock-Absorbing. Excellent resistance to chemicals, solvents, and corrosion. Suitable for industrial and heavy-duty wheels. Rubber, Black

Wheel Center: cast iron core
Outer packaging: rubber

Product descriptions are for reference only. The actual product shall prevail.



Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter (D)	10 "
Wheel Width (T2)	2-13/16 "
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	4-9/16 "
Wheel Mounting Bolt Hole PCD Diameter	—
Wheel Mounting Bolt Hole PCD	5 "
# Of Wheel mounting bolt boles	—
Wheel mounting bolt hole (M)	5
Number of wheel mounting bolt holes	8
Load Capacity (Static)	1323lbs
Load Capacity at 4 km/h	882lbs
Load Capacity at 6 km/h	750lbs
Load Capacity at 10 km/h	617lbs
Load Capacity at 16 km/h	353lbs
Hardness Of Tread	72±5° Shore A
Temperature	-4°F to +176°F
Tread Pattern	V-shaped
Wheel centre/ rim	Cast iron / spray-baked black paint
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	17.9lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	● ● ● ● ●
Operating Noise	● ● ● ● ●
Floor Surface Preservation	● ● ● ● ● ○

2D Dimensional Drawing of Drive Wheel

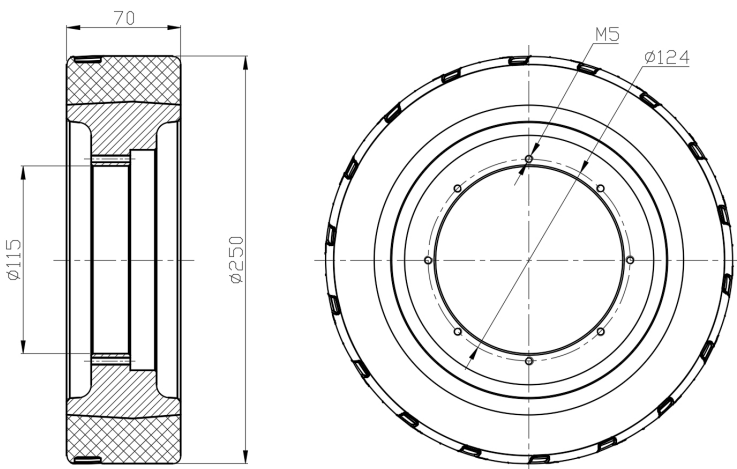

* For any deviation between metric and imperial spec, please refer to the metric spec.