

Rubber Series

Wheel Diameter x Wheel Width 250 x 80mm

EAN

YJ-12046210306101

Made from High-Quality, elastic, non-greasy, environmentally friendly rubber. Features high Resilient, providing excellent Floor Surface Preservation, Shock-Absorbing, and noise reduction. The non-greasy rubber Non-Markings when walked on. Suitable for any surface. Rubber, natural color, Wheel Tread profile: Crown, horizontal and vertical grooves. Increases grip and effectively improves slip resistance.

Wheel Center: cast iron core

Outer packaging: rubber



Picture may differ from original product

Product descriptions are for reference only. The actual product shall prevail.


Technical Data

<input checked="" type="radio"/> Imperial <input type="radio"/> Metric	
Wheel Diameter (D)	10 "
Wheel Width (T2)	3-1/8 "
Wheel installation — Hub Lenth (T1)	—
Wheel center-bore diameter (d)	7 "
Wheel Mounting Bolt Hole PCD Diameter	1/4 "
Wheel Mounting Bolt Hole PCD	7-1/2 "
# Of Wheel mounting bolt boles	10
Wheel mounting bolt hole (M)	M8
Number of wheel mounting bolt holes	2
Load Capacity (Static)	2232lbs
Load Capacity at 4 km/h	1488lbs
Load Capacity at 6 km/h	1265lbs
Load Capacity at 10 km/h	1042lbs
Load Capacity at 16 km/h	595lbs
Hardness Of Tread	60±5° Shore A
Temperature	-4°F to +176°F
Tread Pattern	—
Wheel centre/ rim	Cast iron / spray-baked black paint
Non-Marking	Y
Conductive	N/A
Anti	N/A
Weight	10.7lbs
Standard	ISO22883

Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • • •
Floor Surface Preservation	• • • • ○

2D Dimensional Drawing of Drive Wheel

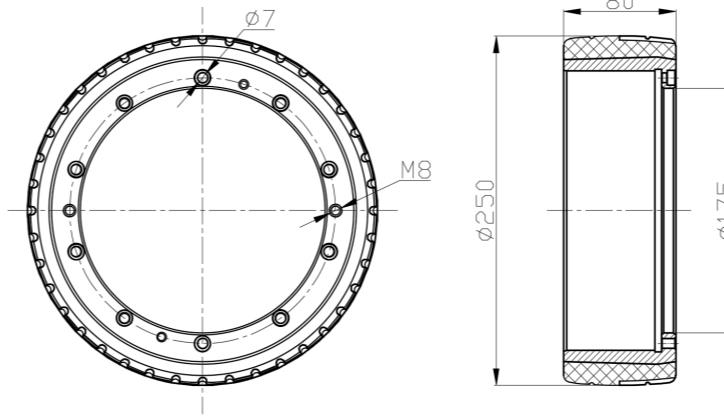

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com