1127 Series — H-3 Series

Dersheng Casters Keep Rolling

PPP (White and Black) Wheel Diameter × Wheel Width 40×20mm

EAN

YJ-W11270150292014

Swivel Caster with Stamping Fabricated Caster Fork 44.5 x 30mm (1-3/4" x 1-1/8") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Polypropylene Wheel Center and tread. White and black finish. Bearing: Ball Bearing.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Swivel Radius

● Imperial ○ Metric

Wheel Diameter 1-5/8
Wheel Width 13/16 "

Wheel Bearing Wheels With Ball Bearings

1-1/2 "

 Plate Size
 2-7/16 " x 1-3/4 "

 Bolt Hole Spacing
 1-13/16 x 1-3/16

 Plate Hole
 3/8 " x 1/4 "

 Offset
 11/16 "

 Swivel Interference
 3 "

 Overall Height
 2-3/8 "

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 88lbs

Load Capacity (Static) 132lbs

Temperature 14°F to +140°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 0.3lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise • • •

Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions

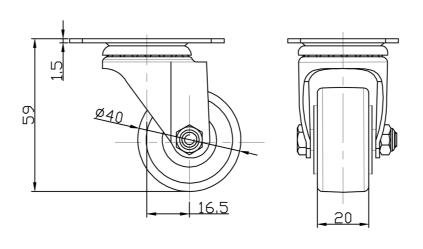

Mounting

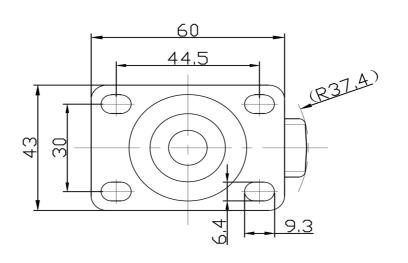

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.