



1127 Series — H-3 Series

PPP (White and Black) Wheel Diameter × Wheel Width 40×20mm


EAN

YJ-W11270150294014

Casters with Total Brakes and a Locking system. Top Plate with Riveted, Stamping Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Polypropylene Wheel Center and tread. White and black. Bearing with Ball Bearing.

Wheel tread: PP polypropylene  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

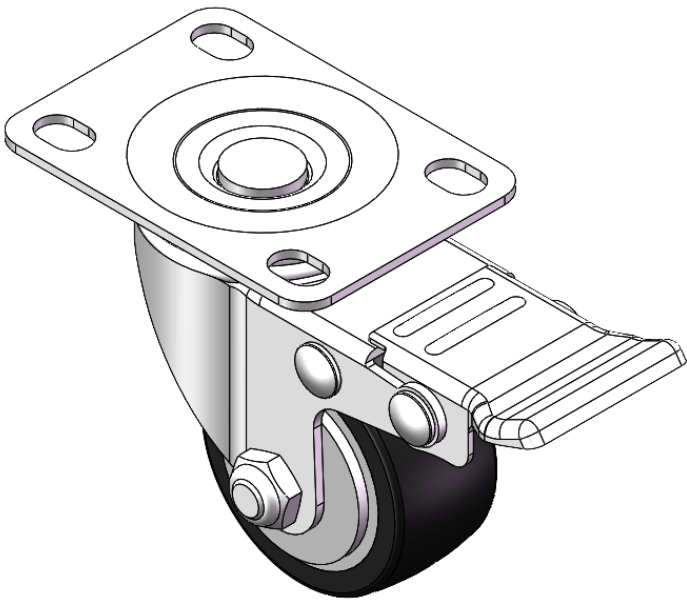

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 1-5/8                          |
| Wheel Width                                                            | 13/16 "                        |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 2-7/16 " x 1-3/4 "             |
| Bolt Hole Spacing                                                      | 1-13/16 x 1-3/16               |
| Plate Hole                                                             | 3/8 " x 1/4 "                  |
| Offset                                                                 | 11/16 "                        |
| Swivel Interference                                                    | 5-1/4 "                        |
| Overall Height                                                         | 2-3/8 "                        |
| Swivel Radius                                                          | 2-5/8 "                        |
| Hardness Of Tread                                                      | 65±5° Shore D                  |
| Load Capacity (Dynamic)                                                | 88lbs                          |
| Load Capacity (Static)                                                 | 132lbs                         |
| Temperature                                                            | 14°F to +140°F                 |
| Fork Type                                                              | Swivel Caster With Total Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 0.4lbs                         |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

Dimensions

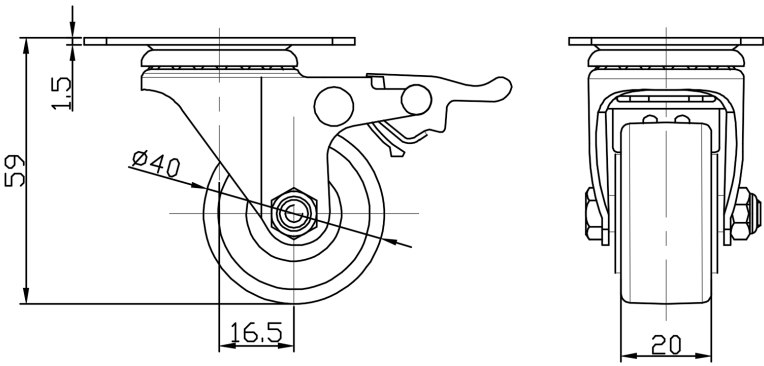

Mounting

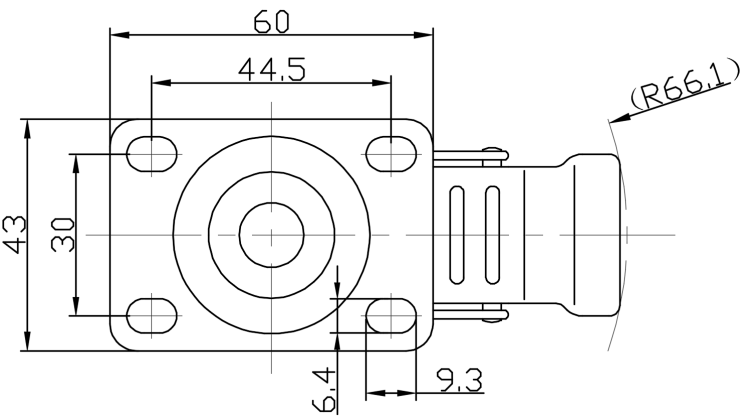

\* For any deviation between metric and imperial spec, please refer to the metric spec.