# 1127 Series — H-3 Series

PPP (White and Black) Wheel Diameter × Wheel Width 40×20mm


EAN

#### YJ-W11270150296014

Casters with Total Brakes and a Locking system. Thread-Riveted Stamping Fork—M8-P1.25. Zine-Plated, Mounting Type - Threaded Stem. Polypropylene Wheel Center and tread. White and black. Bearing—Ball Bearing.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

#### **Technical Data**

	Imp	erial	$\bigcirc$	Metric
--	-----	-------	------------	--------

Wheel Diameter 1-5/8
Wheel Width 13/16 "

Wheel Bearing Wheels With Ball Bearings

Threaded Stem M8-P1.25

Threaded Size 1 "

Offset 11/16 "

Swivel Interference 5-1/4 "

Overall Height 2-7/16 "

Swivel Radius 2-5/8 "

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 88lbs

Load Capacity (Static) 132lbs

Temperature 14°F to +140°F

Fork Type Swivel Caster With Total Brake

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight0.4lbsStandardISO22883


## Advantages at a glance

Rolling Resistance


**Operating Noise** 

Floor Surface Preservation  $\bullet \bullet \circ \circ$ 

### Dimensions

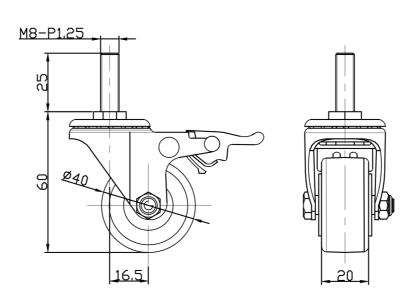

Mounting

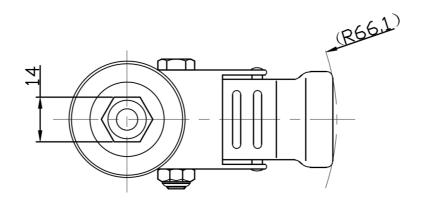

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.