1127 Series — H-3 Series

Dersheng Casters Keep Rolling

PPP (White and Black) Wheel Diameter × Wheel Width 50×23mm

EAN

YJ-W11270200291014

Rigid Caster with Stamping Fabricated Caster Fork 44.5×30 mm (1-3/4" x 1-1/8") Bolt Hole Spacing. Zine-Plated, Mounting Type - Top Plate. Polypropylene Wheel Center and tread. White and black finish. Bearing: Ball Bearing.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

		\sim		
	Metric	()	lmn	erial
•	IVICUIC	\smile	шир	CHAI

Wheel Diameter 50mm Wheel Width 23mm

Wheels With Ball Bearings Wheel Bearing

Plate Size 70 x 53mm **Bolt Hole Spacing** 52 x 35mm Plate Hole 10.7 x 8.1mm Overall Height 73mm

Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 50kgs Load Capacity (Static) 75kgs

Temperature -10°C to +60°C Rigid Caster Fork Type N/A N/A N/A

Stainless **Electrical Conductivity** Anti-Static Weight 0.15kgs Standard ISO22883


Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • • •

Dimensions





Mounting

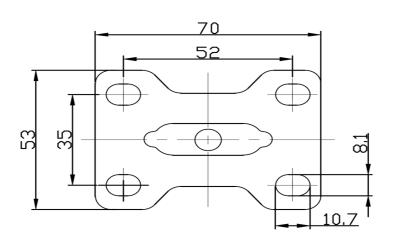

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.