1127 Series — H-3 Series

Dersheng Casters Keep Rolling

PPP (White and Black) Wheel Diameter × Wheel Width 50×23mm

EAN

YJ-W11270200292014

Swivel Caster with Stamping Fabricated Caster Fork and European standard holes. Surface electroplating, Mounting Type - Top Plate. Polypropylene Wheel Center and tread. White or black. Bearing: Ball Bearing.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

● Imperial ○ Metric

2 " Wheel Diameter 7/8 "

Wheel Bearing Wheels With Ball Bearings

2-3/4 " x 2 " Plate Size

Bolt Hole Spacing 1-15/16 " x 1-3/8 " 3/8 " x 3/8 " Plate Hole

Offset 13/16 " 3-9/16 " Swivel Interference Overall Height 2-13/16" 1-13/16 " Swivel Radius Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 110lbs Load Capacity (Static) 165lbs


Temperature 14°F to +140°F **Swivel Caster** Fork Type

Stainless N/A **Electrical Conductivity** N/A N/A Anti-Static Weight 0.5lbs Standard ISO22883


Advantages at a glance

Rolling Resistance Operating Noise Floor Surface Preservation • • • • • •

Dimensions

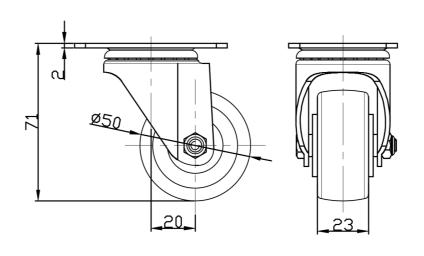

Mounting

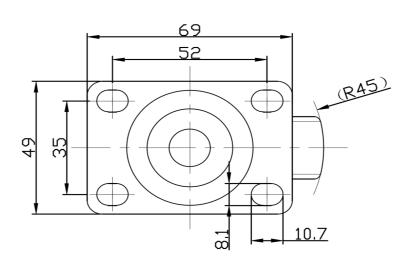

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.