



1127 Series — H-3 Series

PPP (White and Black) Wheel Diameter × Wheel Width 50×23mm


EAN

YJ-W11270200294014

Casters with Total Brakes and Locking system. Top Plate with Riveted, Stamping Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Surface electroplating, Mounting Type - Top Plate. Polypropylene Wheel Center and tread. White and black. Bearing with Ball Bearing.

Wheel tread: PP polypropylene  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

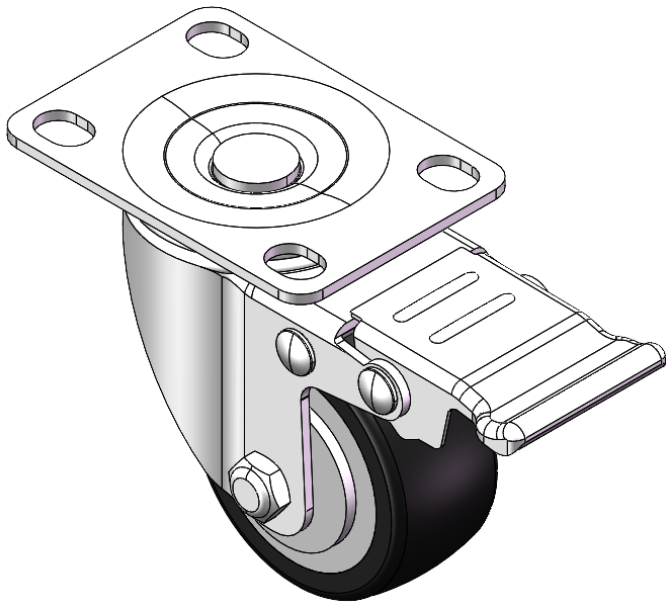

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 50mm                      |
| Wheel Width                                                            | 23mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 69 x 49mm                 |
| Bolt Hole Spacing                                                      | 52 x 35mm                 |
| Plate Hole                                                             | 10.7 x 8.1mm              |
| Offset                                                                 | 20mm                      |
| Swivel Interference                                                    | 154mm                     |
| Overall Height                                                         | 71mm                      |
| Swivel Radius                                                          | 77mm                      |
| Hardness Of Tread                                                      | 65±5° Shore D             |
| Load Capacity (Dynamic)                                                | 50kgs                     |
| Load Capacity (Static)                                                 | 75kgs                     |
| Temperature                                                            | -10°C to +60°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 0.25kgs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

Dimensions

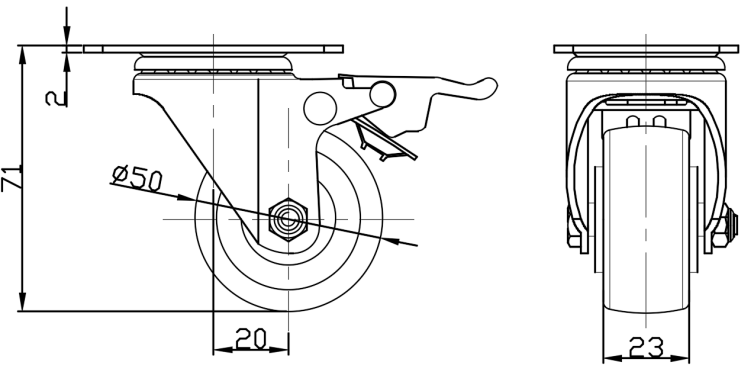

Mounting

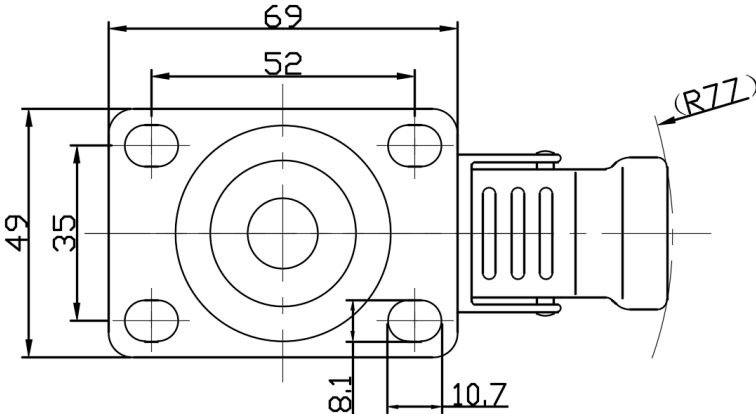

\* For any deviation between metric and imperial spec, please refer to the metric spec.