## 1127 Series — H-3 Series

Dersheng Casters Keep Rolling

PPP (White and Black) Wheel Diameter × Wheel Width 50×23mm


EAN

#### YJ-W11270200294014

Casters with Total Brakes and Locking system. Top Plate with Riveted, Stamping Fork and 75 x 45 mm (3" x 1-3/4") Bolt Hole Spacing. Surface electroplating, Mounting Type - Top Plate. Polypropylene Wheel Center and tread. White and black. Bearing with Ball Bearing.

Wheel tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

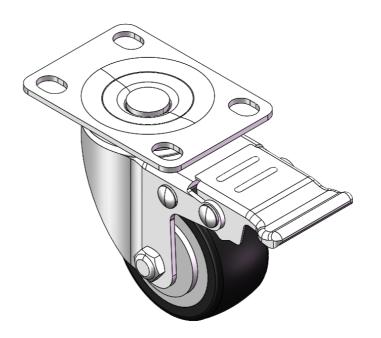

Picture may differ from original product

#### Technical Data

Wheel Width

### ● Imperial ○ Metric

Load Capacity (Static)

2 " Wheel Diameter 7/8 "

Wheels With Ball Bearings Wheel Bearing

2-3/4 " x 2 " Plate Size

**Bolt Hole Spacing** 1-15/16 " x 1-3/8 "

3/8 " x 3/8 " Plate Hole Offset 13/16 "

6-1/8 " Swivel Interference 2-13/16" Overall Height 3-1/16 " Swivel Radius Hardness Of Tread 65±5° Shore D

Load Capacity (Dynamic) 110lbs

Temperature 14°F to +140°F Fork Type **Swivel Caster** 

165lbs

Stainless N/A **Electrical Conductivity** N/A N/A Anti-Static Weight 0.6lbs Standard ISO22883


## Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation • • • • • •

### **Dimensions**





# Mounting

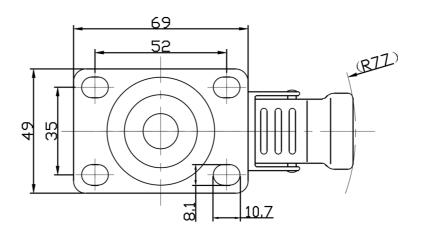

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.