1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm

EAN


YJ-X11290300265013

Swivel Caster. Threaded Stem Riveted Pressed Fork—1/2"-12"
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Pearl-gray finish, Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Stainless

Metric () Imperial

Wheel Diameter 75mm
Wheel Width 31mm

Wheel Bearing Wheels With Ball Bearings

Threaded Stem 1/2"-12牙
Threaded Size 27.5mm
Offset 42.5mm
Swivel Interference 160mm
Overall Height 115mm
Swivel Radius 80mm

Hardness Of Tread 82±5° Shore A

Load Capacity (Dynamic) 70kgs

Load Capacity (Static) 105kgs

Temperature -20°C to +60°C
Fork Type Swivel Caster

N/A

Electrical Conductivity

Anti-Static

N/A

Weight

0.50kgs

Standard

ISO22883

Advantages at a glance


Rolling Resistance


• • • • 0

Operating Noise


Floor Surface Preservation $\bullet \bullet \bullet \bullet \bullet$

Dimensions





Mounting

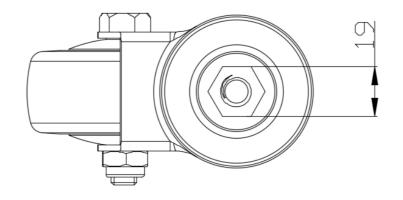

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.