1129 Medical Caster Series

Dersheng Casters Keep Rolling

PPR (Pearlescent dark gray) Wheel Diameter × Wheel Width 75 x 31mm

EAN


YJ-X11290300265013

Swivel Caster. Threaded Stem Riveted Pressed Fork—1/2"-12"
Zine-Plated, Mounting Type - Threaded Stem
High-Quality Impact-Resistant Polypropylene core, High-Quality Reinforced Polypropylene
Rubber (TPR) Wheel Tread
Pearl-gray finish, Ball Bearings.

Wheel tread: Thermoplastic rubber elastomer (TPR)

Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

Imperial	\bigcirc	Metric

Wheel Diameter 3 "

Wheel Bearing Wheels With Ball Bearings

1-1/4 "

-4°F to +140°F

1.1lbs

ISO22883

Threaded Stem 1/2 " -12牙
Threaded Size 1-1/8 "
Offset 1-11/16 "
Swivel Interference 6-3/8 "
Overall Height 4-9/16 "
Swivel Radius 3-3/16 "

Hardness Of Tread 82±5° Shore A
Load Capacity (Dynamic) 154lbs

Load Capacity (Dynamic) 194lbs

Load Capacity (Static) 231lbs

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight Standard

Temperature

Advantages at a glance

Rolling Resistance


• • • • 0


Operating Noise

• • • •


Floor Surface Preservation • • • • •

Dimensions





Mounting

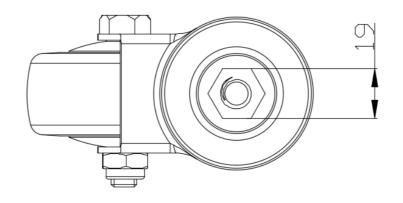

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.